# **Decoline** www.decoline.com.au



KSA (KAB)) ISO 9001

PU Coating \_\_\_\_ Wear Layer \_\_\_ Printed Layer \_\_ Middle Layer \_\_ Fibreglass Layer Middle Layer \_\_ Balance Layer \_\_ NonSlip Layer \_\_

Ĥ



**UIS (E** 














Sandy / DLW 301

### Royal Oak

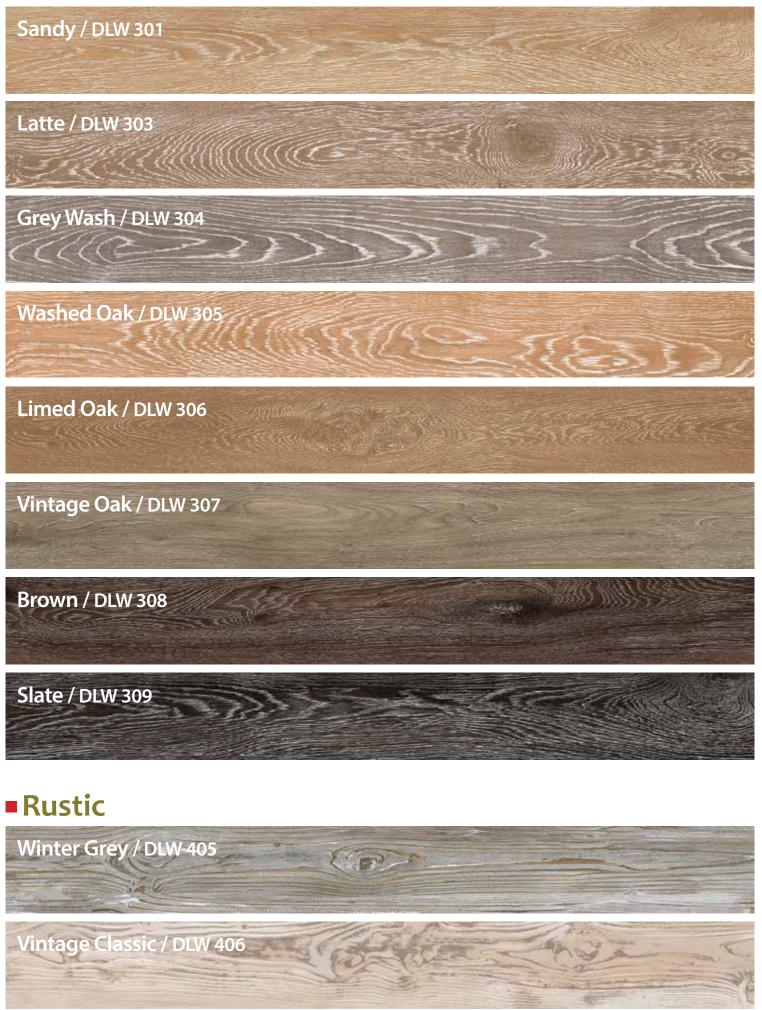

The printed can be different from the real goods in colors. For further information, please contact us.

Authentic timber feel

Latte / DLW 303

Luxurious

Grey Wash / DLW 304






Perfect fit

Limed Oak / DLW 306

## Warm underfoot

Vintage Oak / DLW 307



Brown / DLW 308



Each plank replaceable

Winter Grey / DLW 405

Modern Vintage Classic / DLW 406



Stylish

Mixed Grey / DLW 407





### New wide authentic vinyl floor planks have just arrived on the Australian market.

DecoLine<sup>®</sup> vinyl planks are so easy to install, anyone can do it. No clicking together, just lay and your floor is ready to enjoy. The DIY feature of this product allows you to save on expensive installation costs associated with other products.

DecoLine<sup>®</sup> vinyl planks are the easiest flooring on the market to keep clean. Small spills are easily cleaned and for more serious spills simply pick up the affected plank, clean and re-lay. It's that easy.

At DecoLine<sup>®</sup>, we understand the importance of your family's health and that's why our flooring contains an anti-bacterial amour. DecoLine<sup>®</sup> vinyl planks are the only flooring product in the world to oaffer this health benefit. Your family will love the luxurious feel of DecoLine<sup>®</sup> vinyl flooring; they will believe they are walking on authentic timber flooring.

DecoLine<sup>®</sup> vinyl flooring comes with a 20 year manufacturer's guarantee and is available in a variety of colours and designs.

### Ocean & Oasis product specification

Total Thickness ( mm )	EN 649	5.0+0.13, -0.10mm
Wear Layer Thickness ( mm )	EN 428	0.5 (±0.05)
Peeling Strength of Layer	EN 431	>50N/50mm
Weight	EN 430	8.3+1.0,-0.8kg/m <sup>2</sup>
Packing	EN 427	10 Planks/Box
Dimension stability	EN 434	
Color fastness to light	ISO 105 B02	≥ Grade 6
Static indentation	EN 433	
Flexiblity	EN 435	
Abrasion resistance		Class T
Castor chair resistance	EN 425	Pass
Usage category	EN 685	
Resistance to chemical	EN 423	Pass
Electrostatic properties	EN 1815	< 2kv
Surface treatment		PUR
Embossing	Regular/Deep	

The above information is subject to modifications for the benefit of further improvements.

### LOOSE LAY (Non-Slip) - CARGO INFORMATION

	Thickness	Wearlayer (mm)	Width & Length(mm)	Per CTN	20FT Container loading Quantity
Ocean	5mm	0.5	228.6 x 1219.2	10pcs (2.79sqm)	2,173sqm (780 CTN)
Oasis	5mm	0.5	177.8 x 1219.2	10pcs (2.167sqm)	2,264sqm (1,045CTN)

#### **SLIP & FIRE RATING INFORMATION**

	9	Slip resistance	Fire Rating		
Ocean	AS 4586 2013	P2/Pendulum mean BPN 27	AS/ISO 9239	8.7 kw/m <sup>2</sup> MEAN CRITICAL RADIANT FLUX (CRF)	
	AS 4586 2013	D1/# MEAN COF 0.70		208 PM MEAN SMOKE DEVELOMENT RATE (SDR)	
Oasis	AS 4586 2013	P2/Pendulum mean BPN 28	AS/ISO 9239	8.5 MEAN CRITICAL	
	AS 4586 2013	D1/# MEAN COF 0.70		208 MEAN SMOKE	



# VINYL PLANK®

00

- Authentic Timber Appearance and Feel
- Non-Slip Rubber Backing
- Fibreglass Layer
- MicroCeramic<sup>™</sup> 0.5mm Enhanced Commercial wear layer
- 10 Years Commercial Warranty
- 20 Years Residential Warranty

White Oak / DL503

Natural Oak / DL505

Grey Oak / DL507

Black Butt / DL1130

Spotted Gum / DL1140

Antique Pine / DL1160

Antique Walnut / DL1180

CHANNEL /

Kempas / DL1910

Lime Wash / DL1927

White Wash / DL2221

Ash Brown(Khaki) / DL3113

Charcoal / DL3153



# **Built In Grout Tile**





### 600x600 porcelain-look vinyl tile

2mm built-in grout

5mm thickness

0.5mm commercial wear layer

Revolutionary technology from South Korea delivers these unique 2mm built-in grout (BIG) vinyl tiles to the Australian market.

BIG tiles replace the need for acoustic underlayment and grouting, making this 600x600 porcelain-look vinyl tile flooring extremely easy to lay thanks to the built-in grout on 2 sides of the tile.


### Simply lay and your floor is ready to enjoy.

The DIY feature of this product allows you to install your own tiles and saves on expensive installation costs.

In addition, unlike other tiles these are not cold under foot and are luxurious addition to any environment.


BIG tiles come with a life-time manufacturers guarantee and are available in a variety of colours and designs.



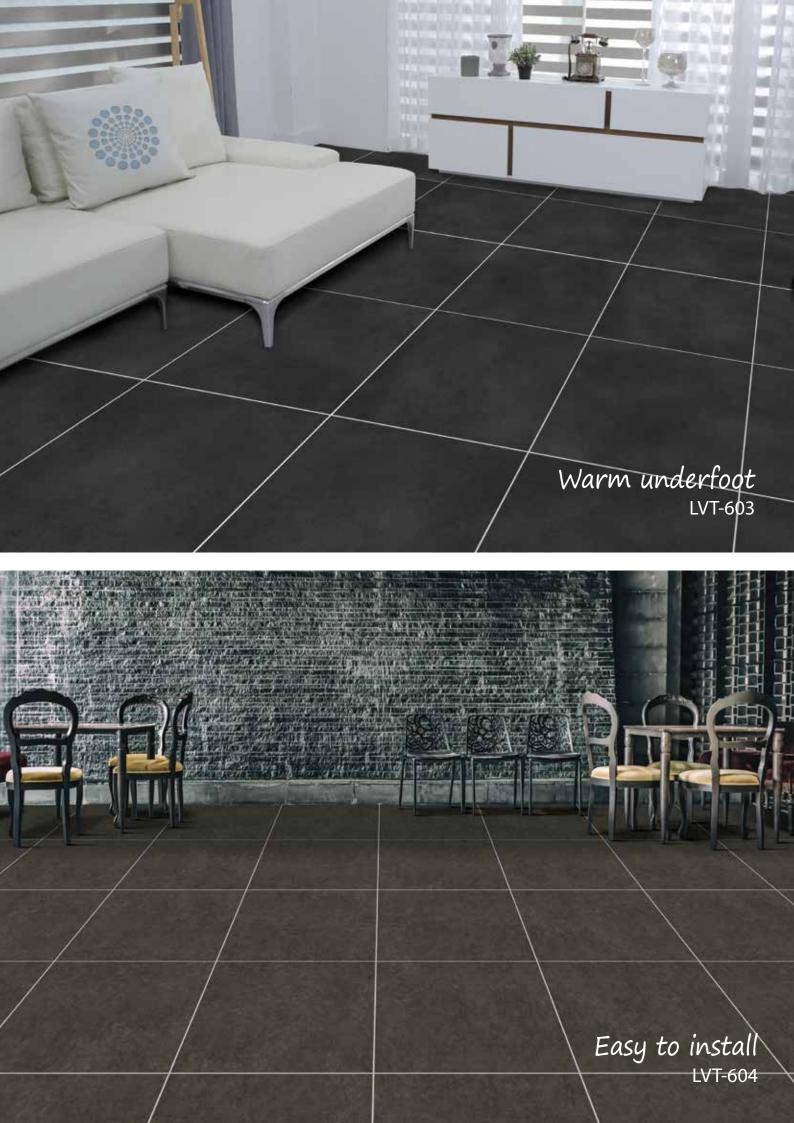

### CERAMIT Products









LVT-601

LVT-602

LVT-603

LVT-604

### **Product Specification**

TEST ITEM	STANDARD	CERAMIT ™ [Loose Lay LVT]	
Level of use	EN 685	23 / 33/ 42	
Dimensional stability	ISO23999 / EN 434	≤0.10%[Norm: ≤0.15%]	
Avrasion group	EN 660-2	Class T	
Castor chair resistance	EN 425	No damage	
	ISO 24342	≤400mm: ≤0.25mm	
Suareness & Straightress	150 24342	>400mm: ≤0.35mm	
	ASTM F2055	≤0.01 in	
	EN 433	≤0.1 in	
Residual indentation	ASTM F 1914	<8%	
Impact sound insulation	ISO 10140-3	9dB	
Light fastness	ISO 105-B02	≥6	
Resistance to chemical	ISO 26987	No Defects	
	ASTM F925	No Defects	
Thermal resistance	ISO 8302	0.01m <sup>2</sup> K/W	
Curling after exposure to heat	ISO 23999	≤1mm	
	AS4586-2013	Pendulum mean BPN 44	
Slip resistance	AS4586-2013	MEAN COF 0.60	
Reaction to fire	AS/ISO 9239.1 2003	CRF: 9.3 kW/m <sup>2</sup>	
	ISO 24344	Passed	
Flexibility	ASTM F137	Passed	
Body Voltage	EN 1815	<2kV	
Resistance against staining	ISO 26987	Passed	
Underfloor heating suitability	EN 12524	Suitable	
Formaldehyde group	EN 717-1	E1	
Indoor air quality		Low VOC	

### CERAMIT Built In Grout Tile

Thickr	ness(mm)	Size	Bevel Gloss Level		cam/bay	Demortica	
Total	W/Layer	mm		GIOSS Level	pcs/box	sqm/box	Remarks
5.0	0.55	600 x 600	Yes	Standard	6	2.16	Built-in Grout (2mm) with'GFL











# **Decoline** www.decoline.com.au



E-MAIL info@decoline.com.au



3/3363~3365 Pacific Highway, Slacks Creek QLD 4127, AUSTRALIA