



CARPET  
PLANKS

# METRO COLLECTION

# METRO COLLECTION

The Metro Collection sets the tone for your business: savvy and strong, offering a unique and stylish look for any space. It has beautiful and timeless textures, gradients and melanges that are easy to love and will last forever.

The popular darker colours and patterns are more forgiving than solid colours. Ideal for offices, retail, schools and especially suitable for commercial environments, Metro provides flexibility, durability, high comfort and aesthetics.






COMMUTE



COMMUTE



CITYSCAPE

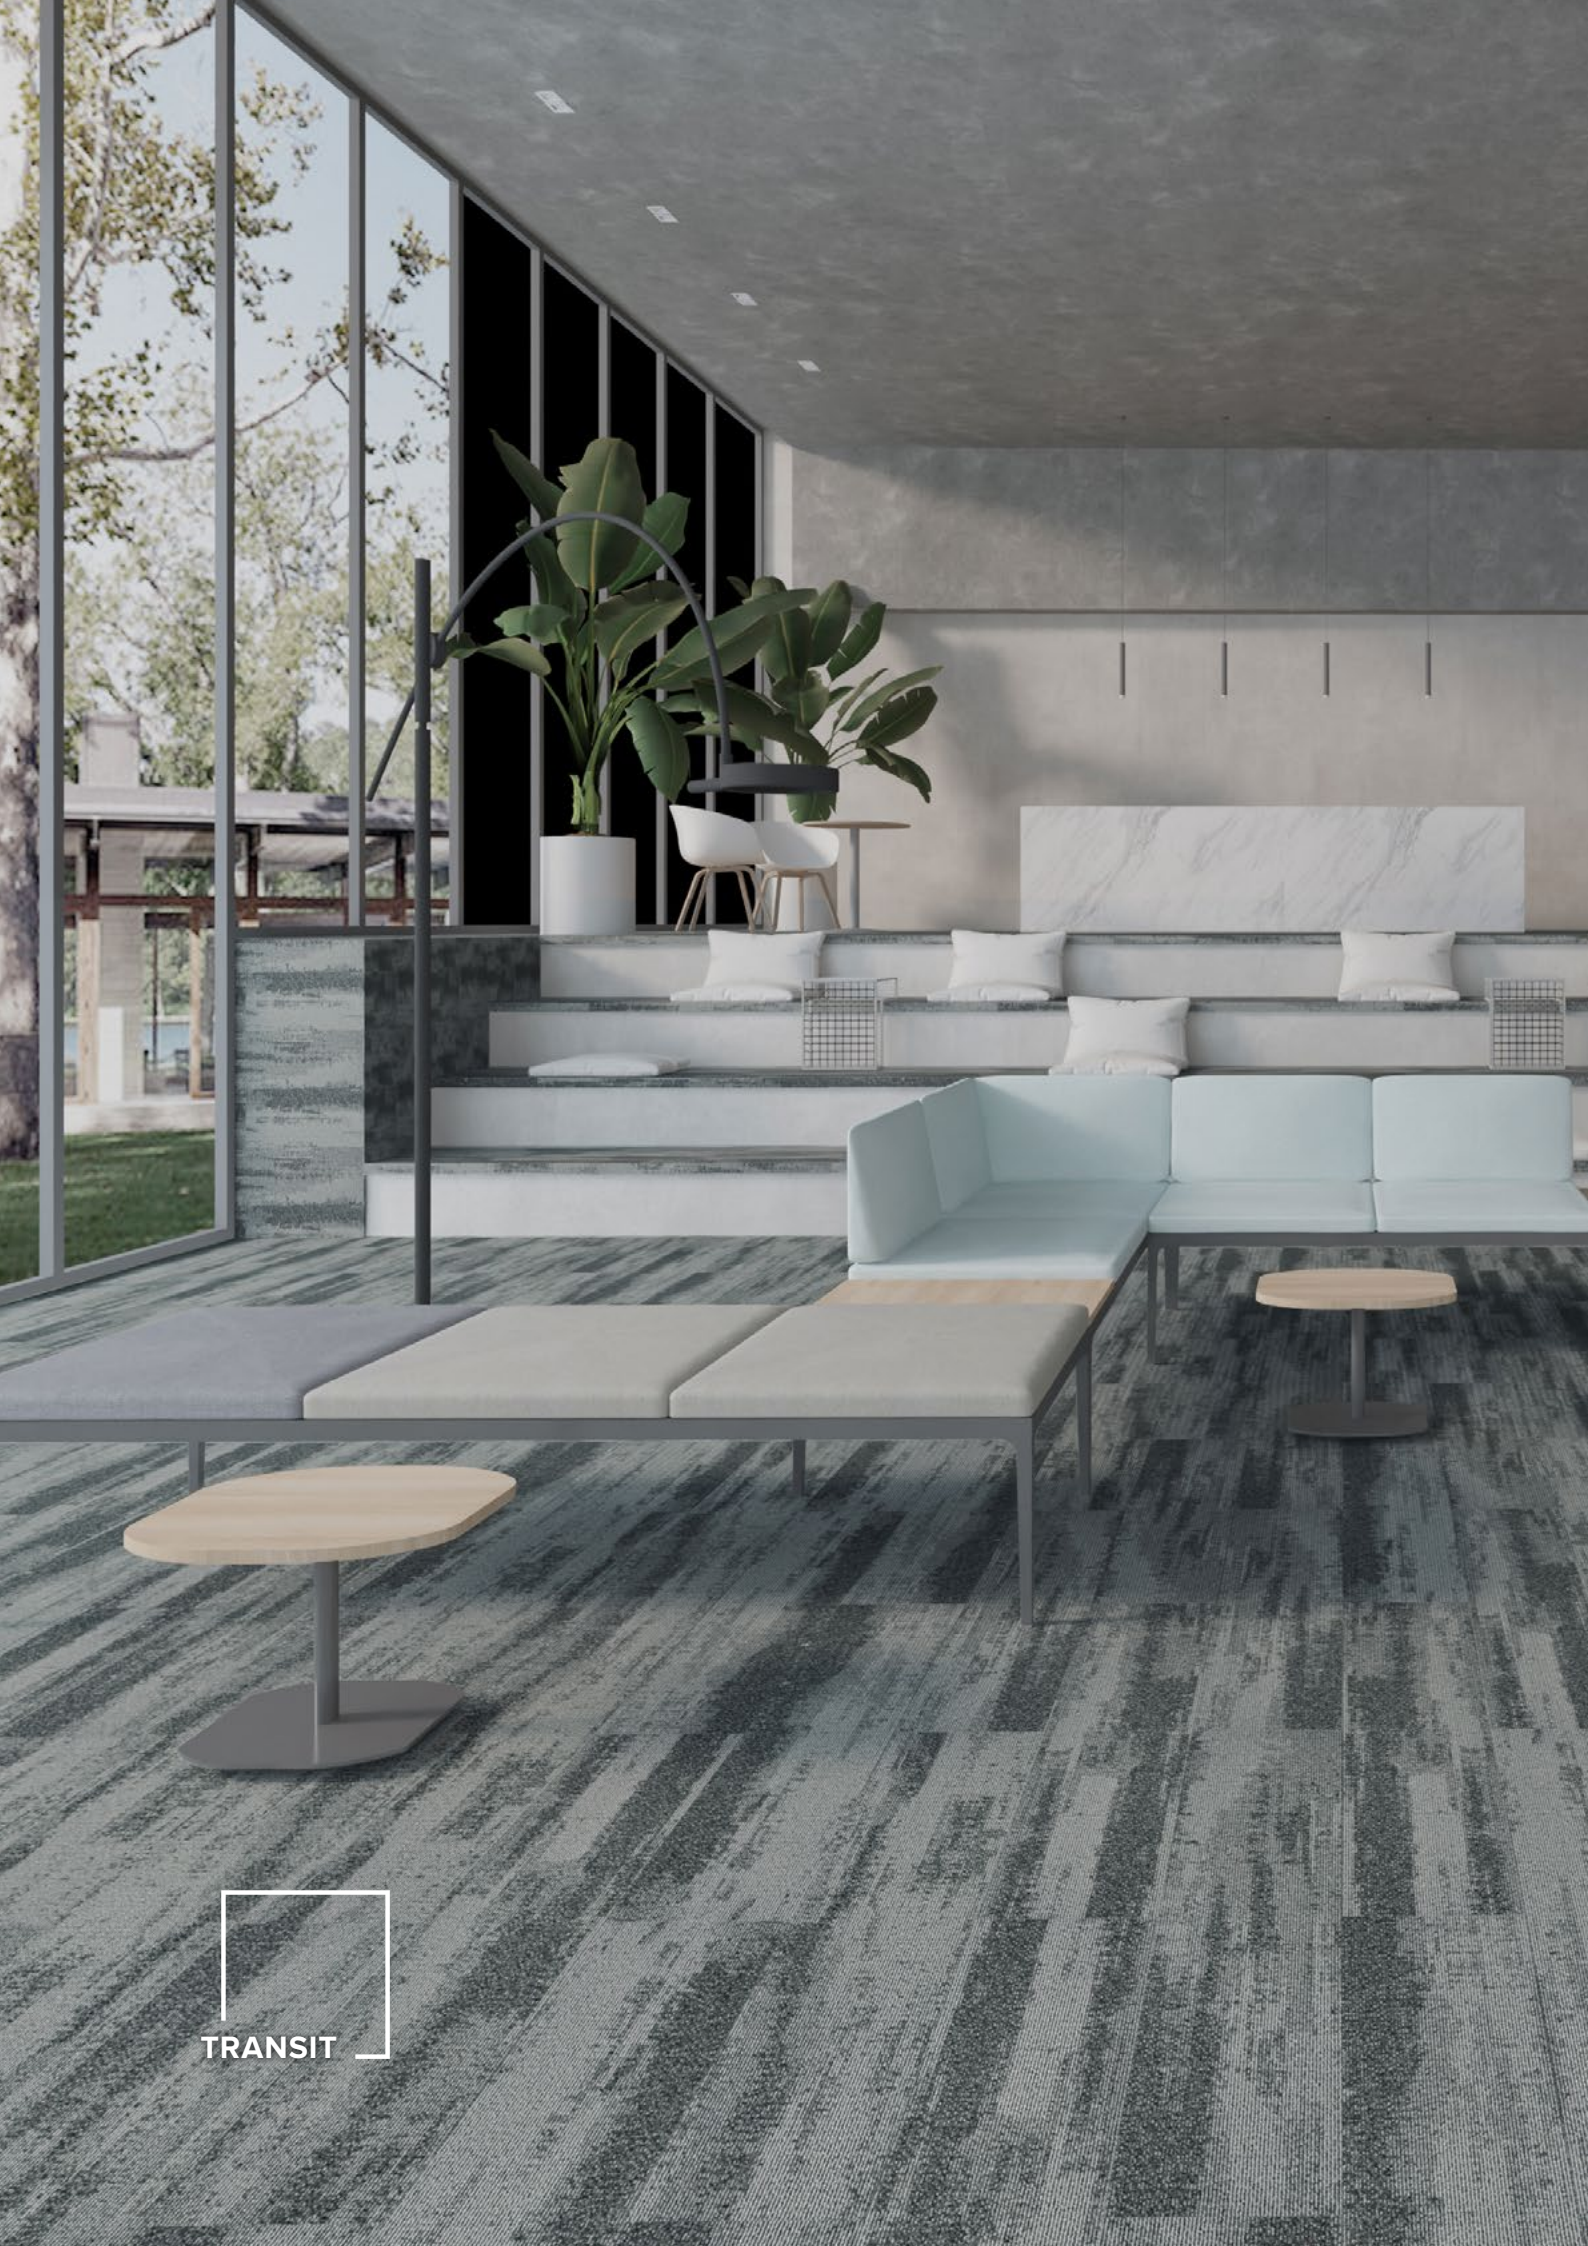

TRANSIT



CITYSCAPE  
& TRANSIT






TRANSIT &  
SUBWAY



TRANSIT &  
UNDERGROUND



SUBWAY

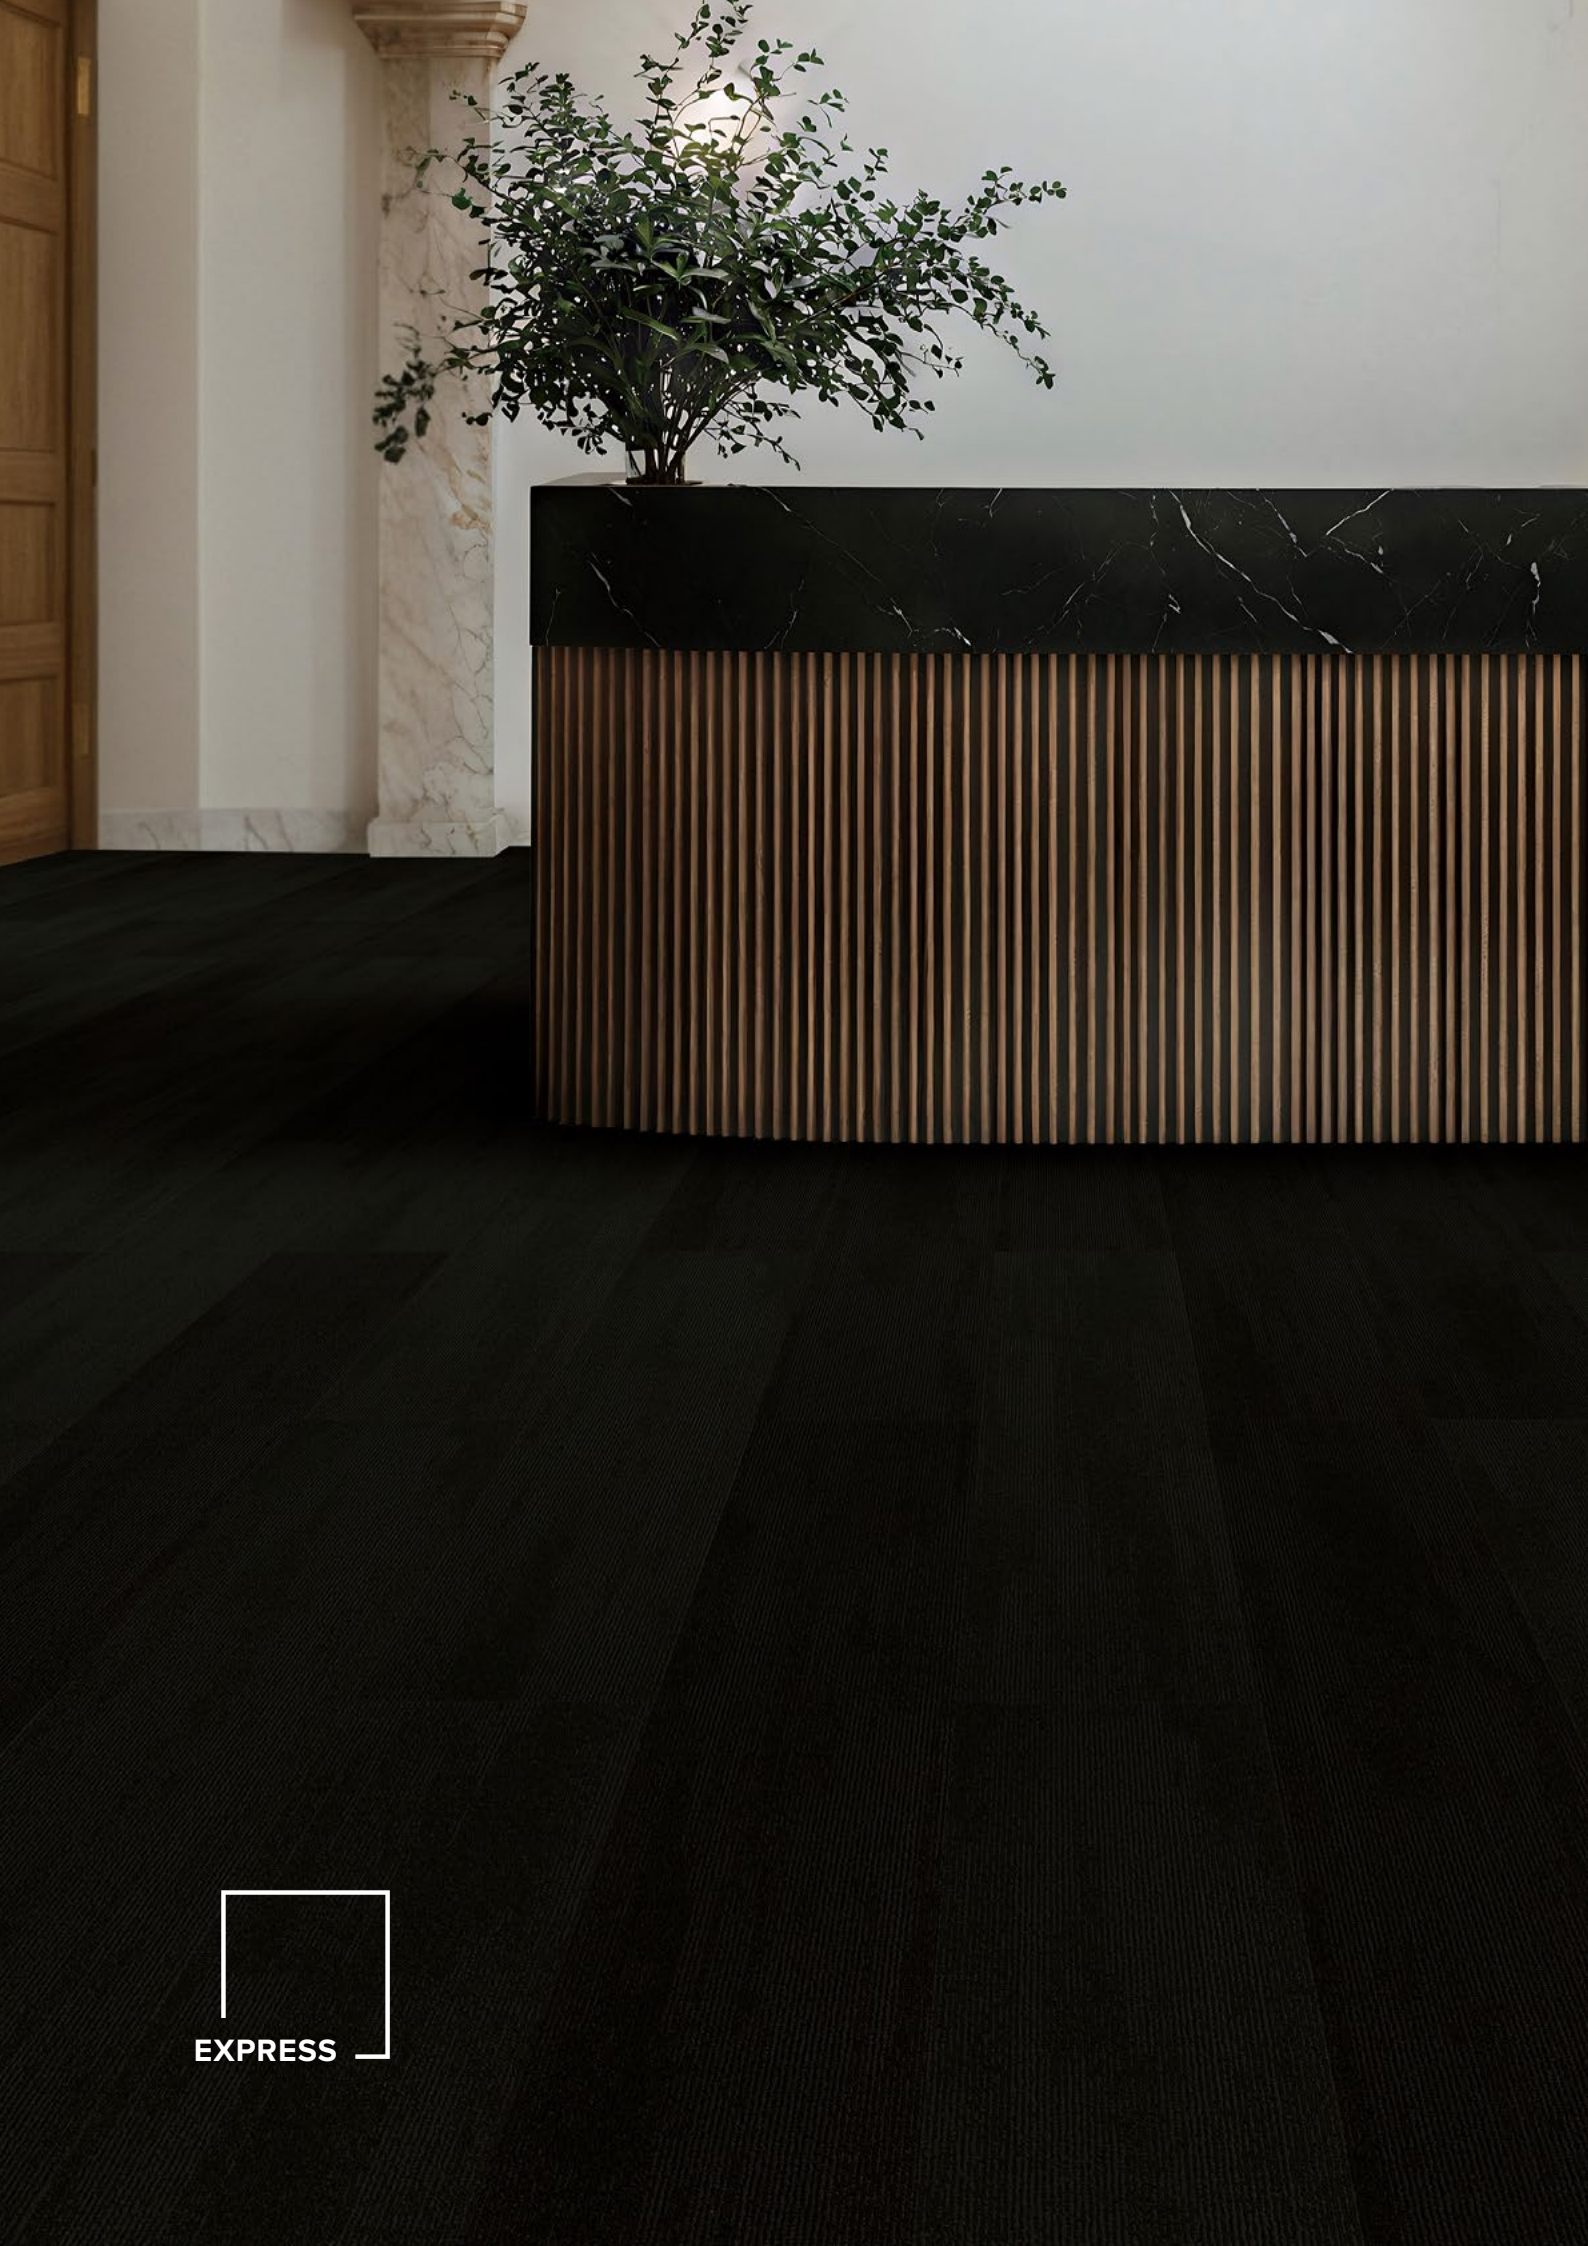





EXPRESS




**COMMUTE**

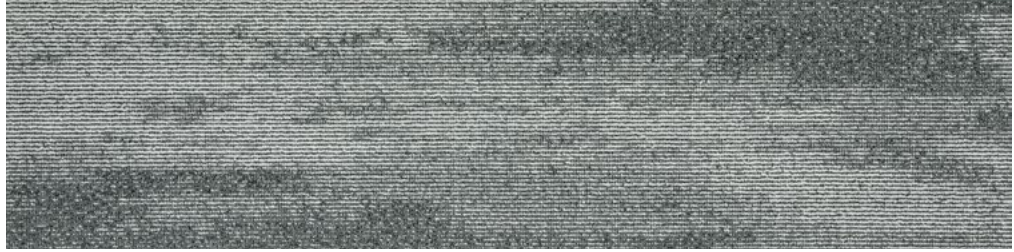

**CITYCAPE**

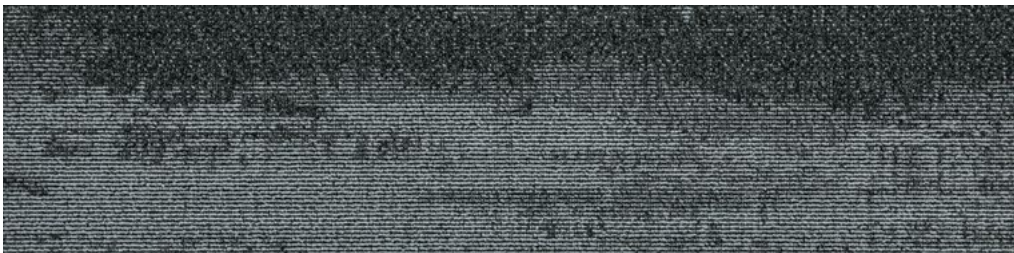


**TRANSIT**

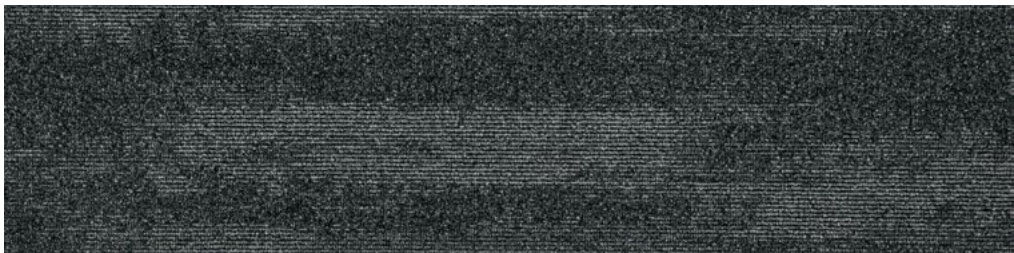

**SUBWAY**



**UNDERGROUND**

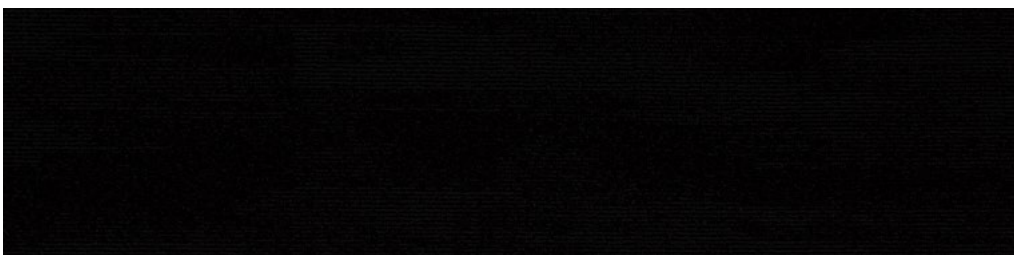

**EXPRESS**



# METRO

## TECHNICAL SPECIFICATIONS

<b>Flooring Type</b>	Multi-Level Loop Pile Carpet Planks
<b>Yarn / Fibre</b>	100% Solution Dyed Nylon
<b>Machine Gauge</b>	1/12th
<b>Pile Height</b>	3.0mm +/-0.5mm
<b>Overall Thickness</b>	PVC: 5.0mm +/-0.5mm / Cushion: 8.0mm +/-0.5mm
<b>Plank Size</b>	25cm x 100cm
<b>Backing Structure</b>	PVC Backing: Recycled Content / Cushion Backing: PET
<b>Installation Method</b>	Herringbone, Ashlar, Brick

## SUSTAINABILITY SPECIFICATIONS

<b>Less Waste</b>	Modular carpet creates 85 – 90% less waste than broadloom carpet
<b>Product Stewardship</b>	100% take back & repurpose through accredited partner
<b>Recycled Content</b>	Minimum of 55% recycled content in the backing structure Average of 40% recycled content by weight of product
<b>Accreditation</b>	Carpet Institute of Australia ECS4 Carpet & Rug Institute Green Plus (CRI Green Plus) EU CE Accreditation ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate


## PERFORMANCE SPECIFICATIONS

<b>Classification (use area)</b>	Commercial
<b>Dimensional Stability</b>	Less than 0.2% variation
<b>Biocontaminant Control</b>	Ultra Fresh Anti-microbial treated
<b>Anti-Static</b>	AATCC134 < 3500 Volts
<b>Warranty</b>	To be installed according to Australian Standards AS/NZS 2455.1:2019 and AS/NZS 2455.2:2019. 15 year warranty: <ul style="list-style-type: none"> <li>• Manufacturing defect</li> <li>• Dimensional stability</li> <li>• Electrostatic propensity</li> </ul>

Specifications are subject to manufacturing tolerances and may be changed without notice.  
Colour variation may occur between sample and supplied products due to dye lot tolerances.



Underground

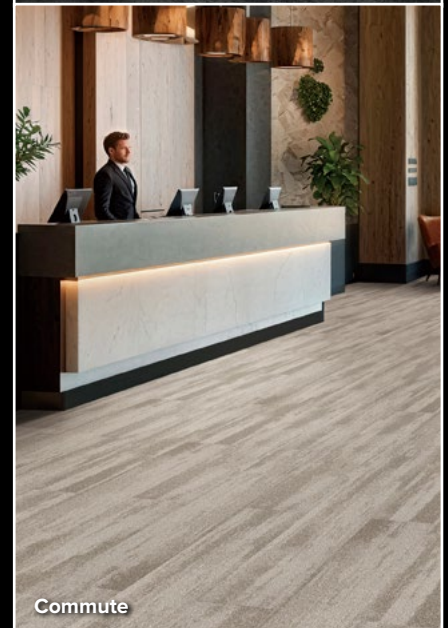

Commute

