



CARPET
TILES

LAKE SIDE COLLECTION

AIRLAY 

LAKESIDE COLLECTION

The Lakeside Carpet Tile collection is designed to evoke a sense of natural beauty and tranquility, drawing inspiration from earthy tones and textures. Creating a soothing and visually appealing environment, the tile brings a sense of calmness and natural beauty into interior spaces.

Made from solution-dyed nylon, the multi-level loop pile construction adds texture whilst ensuring durability, making it ideal for commercial offices, retail spaces, hospitality settings, and various workplaces




WHISPER





CRIMSON





THUNDER



POWDER




城起·空间设计 www.zhuang520.com

MOSS



FLINT &
POWDER

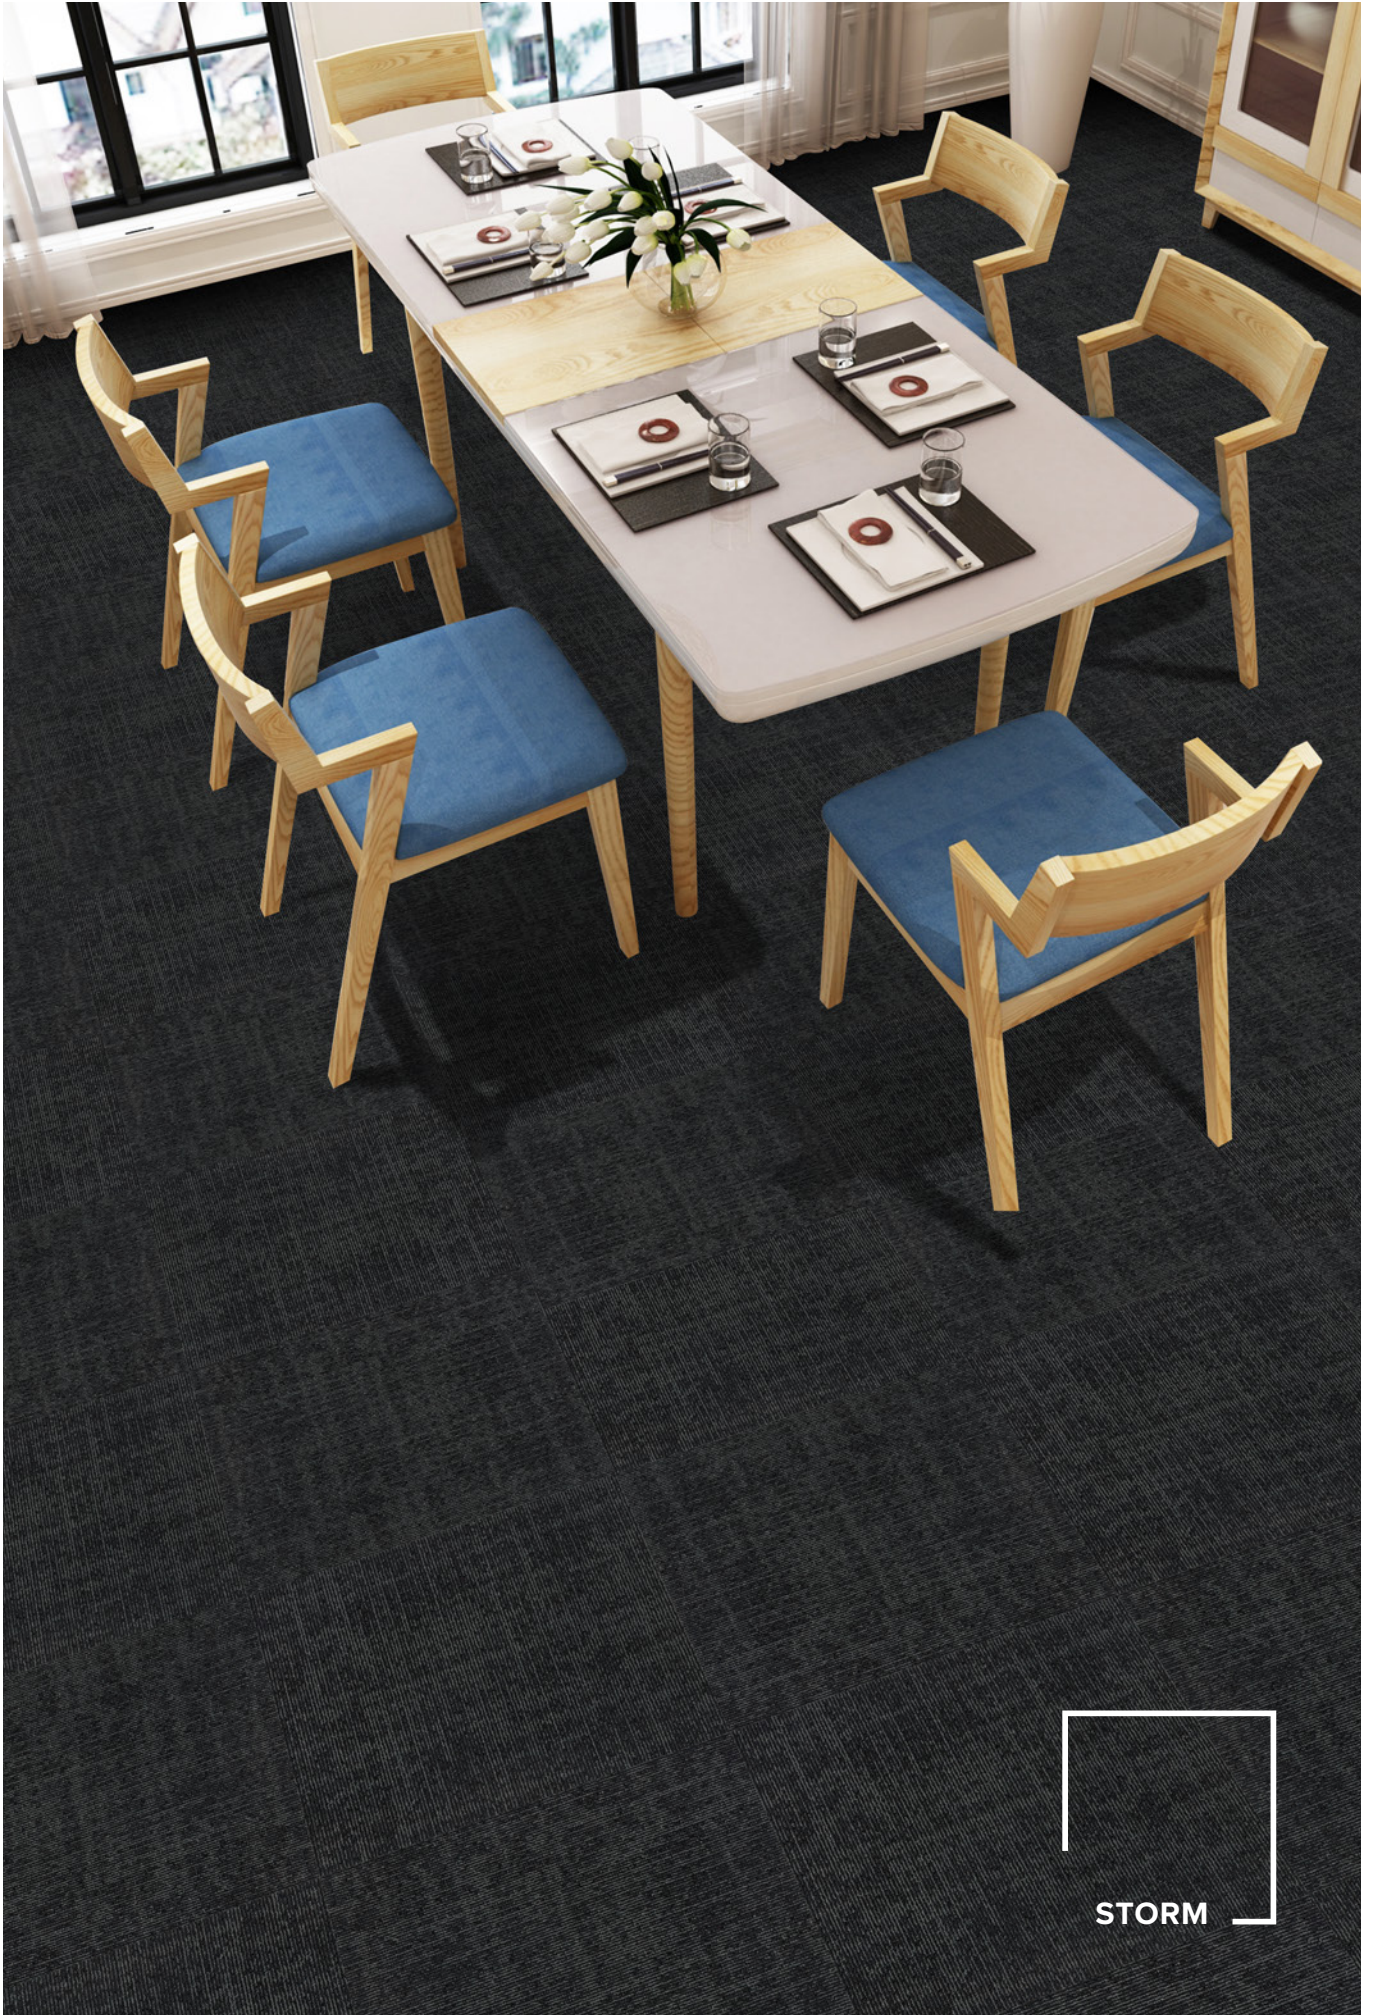

STORM



城起·空间设计 www.zhuang520.com


NAVY




INK &
POWDER




POWDER &
WHISPER

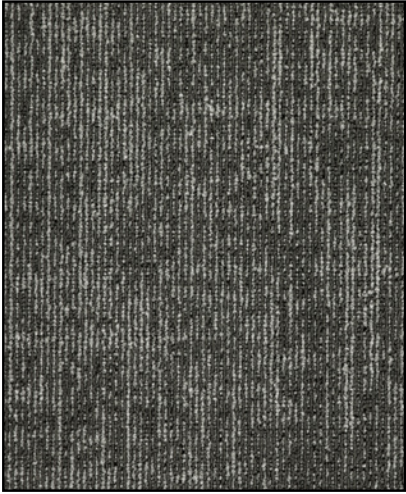


FLINT

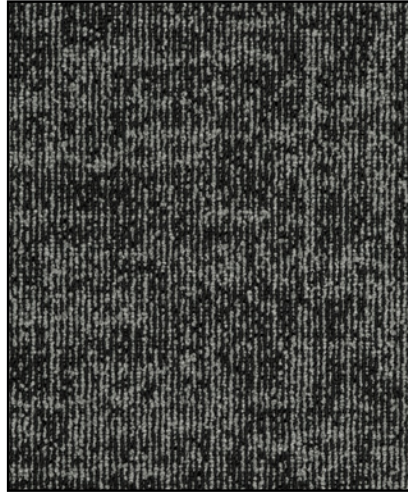

INK

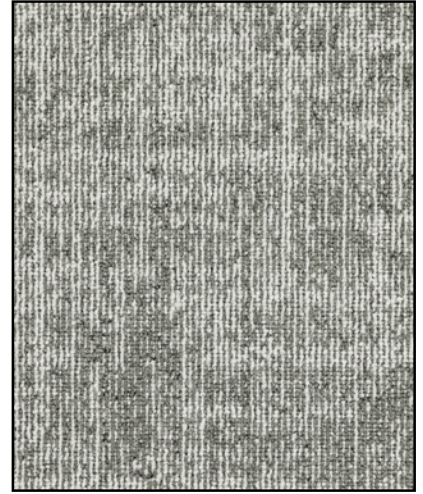


POWDER

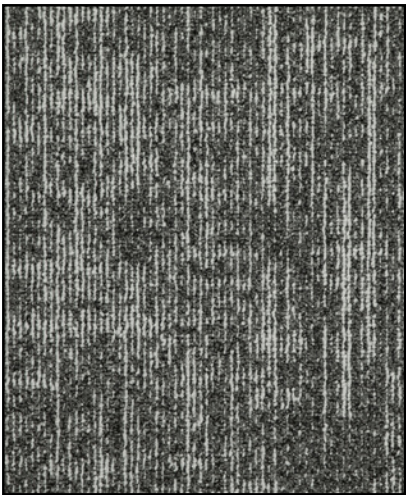


WHISPER




THUNDER

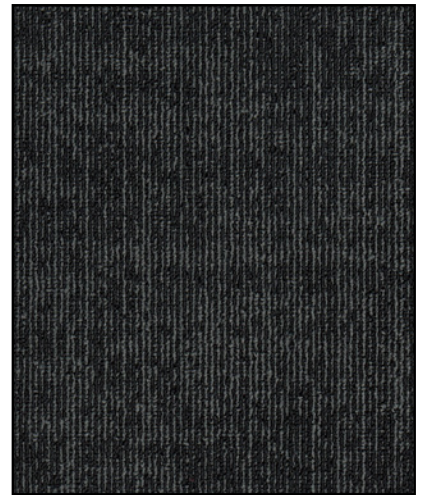


STORM

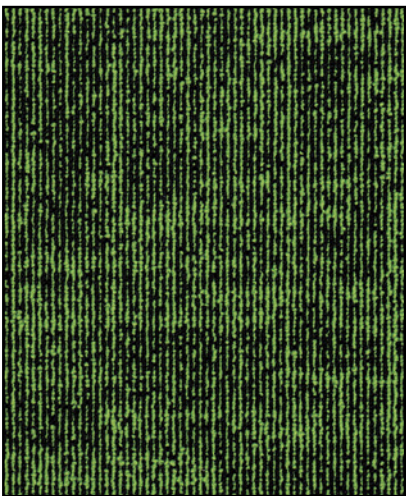

MOSS

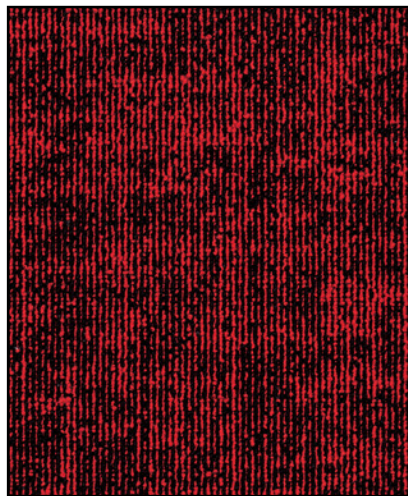

CRIMSON

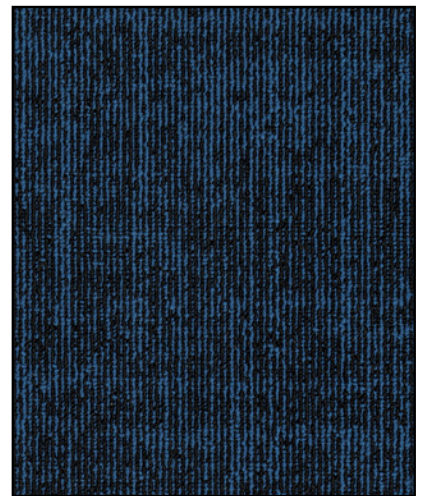

NAVY



LAKESIDE



Powder & Whisper



Crimson



Flint

TECHNICAL SPECIFICATIONS


| | |
|----------------------------|-----------------------------------|
| Product Range | Lakeside |
| Product Description | Multi-Level Loop Pile Carpet Tile |
| Yarn / Fibre | 100% Solution Dyed Nylon |
| Machine Gauge | 1/12th |
| Pile Height | 3.0mm +/-0.5mm |
| Total Thickness | 5.0mm +/-0.5mm |
| Tile Size | 50cm x 50cm |
| Backing Structure | PVC with Recycled Content |
| Installation Method | Quarter Turn, Brick, Ashlar |

SUSTAINABILITY SPECIFICATIONS

| | |
|----------------------------|--|
| Less Waste | Modular carpet creates 85 – 90% less waste than broadloom carpet |
| Product Stewardship | 100% take back & repurpose through accredited partner |
| Recycled Content | Minimum of 55% recycled content in the backing structure Average of 40% recycled content by weight of product |
| Accreditation | Carpet Institute of Australia ECS4 Carpet & Rug Institute Green Plus (CRI Green Plus) EU CE Accreditation ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate |

PERFORMANCE SPECIFICATIONS

| | |
|-------------------------------|--|
| Area of Use | Commercial |
| Dimensional Stability | Less than 0.2% variation |
| Biocontaminant Control | Ultra Fresh Anti-microbial treated |
| Anti-Static | AATCC134 < 3500 Volts |
| Warranty | To be installed according to Australian Standards AS/NZS 2455.1:2007 and AS/NZS 2455.2:2007. 15 year limited warranty: • Manufacturing defect • Dimensional stability • Electrostatic propensity |



Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.