

HURFORD'S

Product Catalogue



Contents

Environment Focus	3
Fourteen+	4
The Woodlands Collection	5
French Oak	6
Hurford Roasted	7
Thermally Enhanced Hardwood	7
Solid Flooring Specifications	8
XL Parquetry	9
American Oak	10
Genuine French Oak	10
Solid Oak Block Parquetry	11
The Importance In Selecting The Right Finish For Your Floor	11
Australian Native	12
Australian Native Herringbone	12
Australian Native Optimise	12
Genuine Oak	13
Naked Oak	13
HM Walk	14
Burleigh Floors	15
Hurford Herringbone	16
Hurford's Parquetry	16
Heritage Luxury Vinyl Plank	17
SupaCore	17
Shou Sugi Ban	18
Wood Elements	19
Boss Board	20
Wall Linings	22
Decking, Screening & Shiplap	23
Trex	24
Joinery Timber	26
Landscaping & Structural Timber	27
Cypress Products	27
Panel & Plywood	28
EchoPanel	29
OneTrim	30
About Hurford's	31



Environment Focus

“ Responsibly sourced wood is the only renewable building material available; it is naturally grown and removes CO2 from the atmosphere. Wood products then store the carbon that the growing trees have removed from the air. The production and processing of wood uses much less energy than most other building materials, giving wood products a significantly lower carbon footprint. ”

Quote from Make It Wood, organised by Planet Ark.



Sustainability and longevity of the timber industry is always on the agenda for the Hurford family. With over 90 years of trade and a vision to invest for the future, Hurford's is dedicated to doing their bit to help the environment. By investing in land to establish their own plantations they aim to commence ongoing sustainable harvesting and management of these plantations for years to come.

Hurford's is an accredited company, obtained by a third party assessment body to provide the confidence that Hurford's is compliant and upholds environmental standards and requirements of specific Australian codes of practice.

Hurford's are committed to our forest, our environment and our future.



FOURTEEN +

SOLID HARDWOOD TIMBER FLOORING | BY HURFORD'S

Creating beautiful timeless hardwood floors has never been easier or more affordable than with **FOURTEEN +** from Hurford's. Using the highest quality Australian Hardwood, Hurford's have created a superior hardwood floor, designed to better utilise our precious resource and provide an improved long term performance.

Better by Design

With a 7.5mm top shoulder, **FOURTEEN +** increases the number of times the product can be sanded and re-sanded, increasing the longevity of the flooring. **FOURTEEN +** exceeds the wear layer of traditional flooring by 25%.

Long Lengths


With a length range of 500mm to 4.5m, **FOURTEEN +** has a spread of lengths comparable to a traditional floor, giving the floor a more natural strip flooring appearance.

Superior Drying

Hurford's attention to detail when it comes to drying is unsurpassed and is the foundation of a successful hardwood floor. Superior drying, using exacting kiln schedules, ensure a more stable flooring.

Easy Installation

FOURTEEN + can be installed using the same installation method employed with traditional 19mm floors over structural subfloors – using the secret nail and bead gluing system.

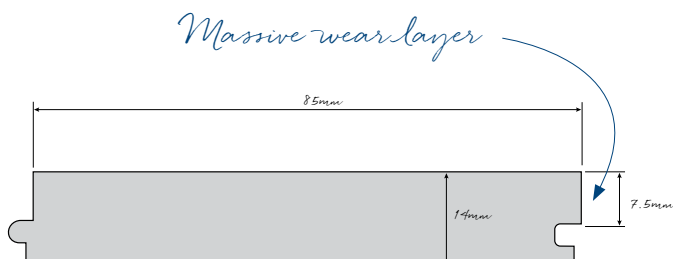

FOURTEEN + is a hardwood flooring product designed to be installed on any suitable subfloor, such as plywood, particleboard flooring, or old floorboards.

FOURTEEN + cannot be laid directly to floor joists or battens and is a non-structural product.



FOURTEEN + Specification

Size	85mm x 14mm
Profile	Tongue & Groove, End Matched
Wear Layer	7.5mm
Length	500mm to 4500mm
Grade	Select, Standard & Feature
Aust Standard	Manufactured to AS 2796.1



The Woodlands Collection

SOLID HARDWOOD TIMBER FLOORING
BY HURFORD'S

Brought together to share the diversity of Australian hardwood species, in one of Hurford's most loved flooring collections.

A Solid Hardwood Floor is an investment for a lifetime. It not only adds value to your home but makes a high-end style statement all on its own.



SYDNEY BLUE GUM

Eucalyptus saligna


A popular species for its beautiful colour, straight grains, strong and hard natural attributes. Making it sought after for both domestic and commercial flooring projects.



BRUSHBOX

Lophostemon confertus


Brings warmth, displays appealing features and matches well with modern elegant spaces. Brush Box has an even texture with very tight interlocking grain.

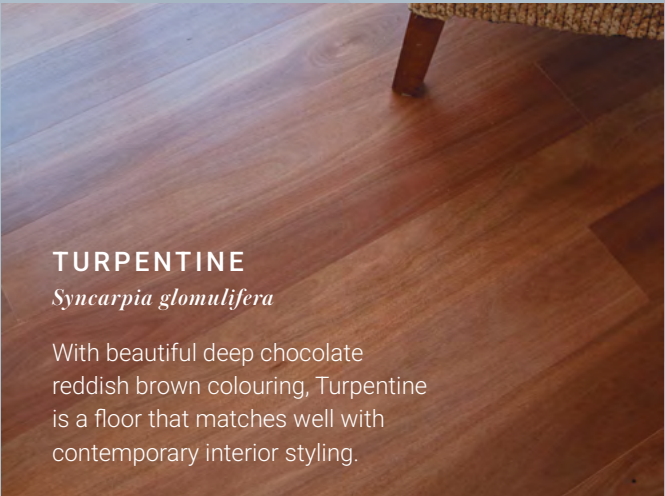

TURPENTINE

Syncarpia glomulifera


With beautiful deep chocolate reddish brown colouring, Turpentine is a floor that matches well with contemporary interior styling.

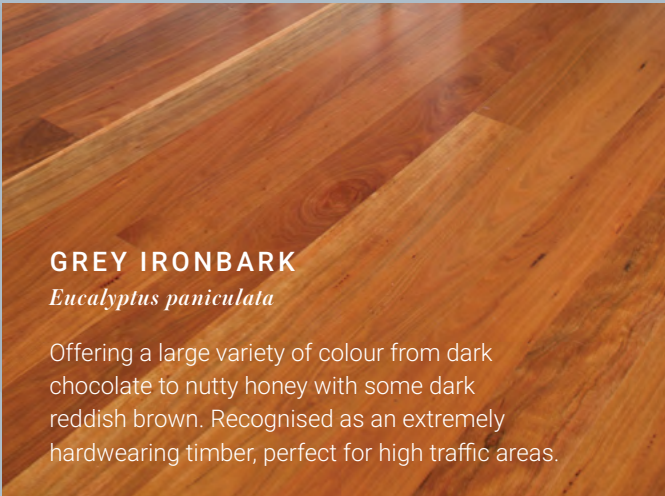

GREY IRONBARK

Eucalyptus paniculata


Offering a large variety of colour from dark chocolate to nutty honey with some dark reddish brown. Recognised as an extremely hardwearing timber, perfect for high traffic areas.

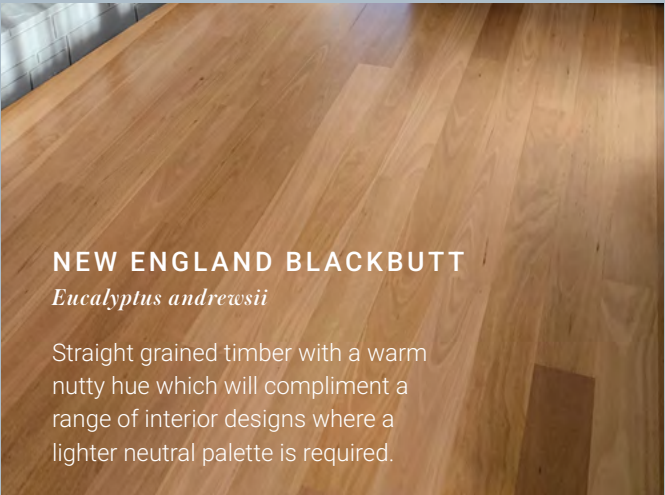

NEW ENGLAND BLACKBUTT

Eucalyptus andrewsii

Straight grained timber with a warm nutty hue which will compliment a range of interior designs where a lighter neutral palette is required.

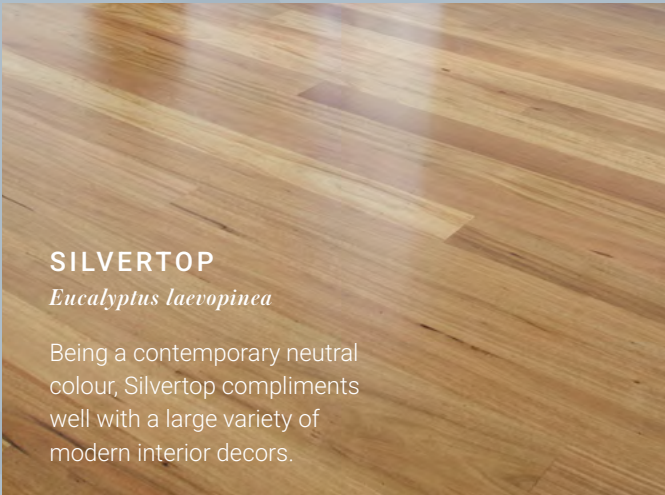

SILVERTOP

Eucalyptus laevopinea

Being a contemporary neutral colour, Silvertop compliments well with a large variety of modern interior decors.



FRENCH OAK

Specialty timber by Hurford's



Inspired by the elegance of Parisian living, Hurford's French Oak is a celebration of quiet luxury, a material story shaped by heritage and designed for Australian spaces.

	French Oak Solid Overlay	French Oak Solid Flooring
Source:	Hurford France	Hurford France
Grade:	Provincial	Provincial
Finished Size:	133mm x 11mm (above the tongue: 5mm)	130mm x 21mm (above the tongue: 8mm)
Lengths:	Random Length 400mm to 3.0m	Random Length 600mm to 3.0m
Profile:	Secret Nail, Tongue & Groove, EM	Secret Nail, Tongue & Groove, EM
Finish:	Unfinished, Raw	Unfinished, Raw
Installation:	Overlay Plywood, Particleboard or Concrete - Plywood Direct Stick or Secret Nail/Glue, Concrete Direct Stick or Secret Nail/Glue	Plywood, Particleboard - Secret Nail/Glue
Site Sand & Finish:	Clear or stained coating (accepts stains exceptionally well).	Clear or stained coating (accepts stains exceptionally well).
Packaging:	Handy bundles (approx. 2.10m ² per bundle)	Structural flooring packs (approx. 33m ² per pack)




Scan for more info:




Hurford Roasted is a high temperature thermally modified hardwood that uses a custom designed heating program to alter the woods molecular structure. This has many benefits that include locking in the colour, increasing the durability and limiting movement to a fraction of normal kiln dried flooring.

Roasted Peat ranges from natural dark earth hues to dark chocolate tones. Roasted Cayenne has an intimate reddish bronze palette.

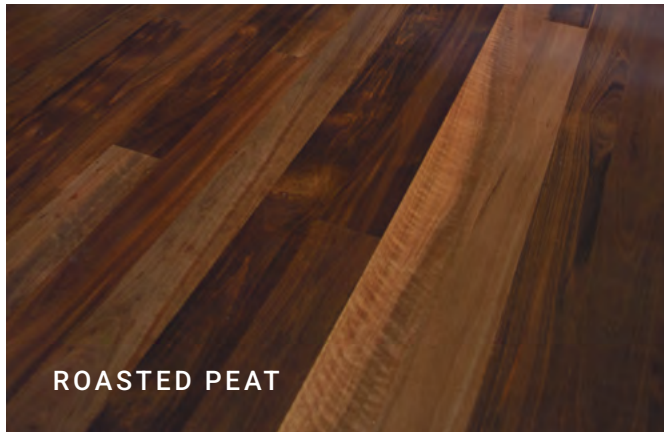

ROASTED PEAT

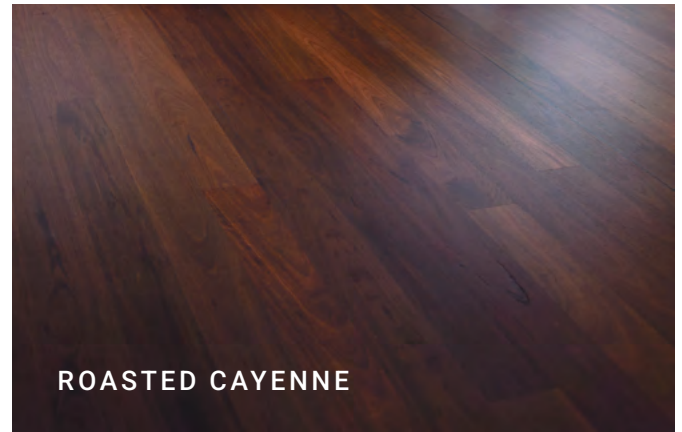

ROASTED CAYENNE



Thermally Enhanced Hardwood

BY HURFORD'S

This process uses a unique temperature schedule through the drying process to create a colour palette that reflects the more traditional tones in the species, blending the tones together to provide a more uniform look.



THERMALLY
ENHANCED
SYDNEY BLUE GUM
Eucalyptus saligna



THERMALLY
ENHANCED
GREY IRONBARK
Eucalyptus paniculata



THERMALLY
ENHANCED
SPOTTED GUM
Corymbia maculata

Solid Flooring Specifications

Species Product Matrix	Ultra10	Overlay			Fourteen		Fourteen+	Traditional			
	86 x 10mm	83 x 12mm	86 x 12mm	83 x 14mm	130 x 14mm	180 x 14mm	85 x 14mm	60 x 19mm	80 x 19mm	130 x 19mm	180 x 21mm
Blackbutt	○	○	○	○	○	○	○	○	○	○	○
Brush Box	○	○	○	○	○	○	○	○	○	○	○
Flood Gum/ Rose Gum									○	○	
Grey Box	Available on request										
Grey Ironbark	○	○	○	○	○	○	○	○	○	○	○
Mixed Hardwood								○	○	○	
New England Blackbutt		○	○	○	○	○	○		○	○	○
Red Ironbark	○	○	○	○	○	○	○		○	○	○
Roasted Cayenne	○			○	○ 128 x 14mm	○ 178 x 14mm					
Roasted Peat	○			○	○ 128 x 14mm	○ 178 x 14mm					
Silvertop		○	○	○	○	○	○		○	○	○
Spotted Gum - NSW	○	○	○	○	○	○	○	○	○	○	○
Spotted Gum - QLD				○	○	○	○	○	○	○	○
Sydney Blue Gum	○	○	○	○	○	○	○	○	○	○	○
Tallowwood	○	○		○	○	○	○	○		○	○
Thermally Enhanced Grey Ironbark		○		○	○	○	○	○		○	○
Thermally Enhanced NSW Spotted Gum				○	○	○	○		○	○	○
Thermally Enhanced Sydney Blue Gum		○		○		○	○		○	○	○
Turpentine		○		○	○	○			○	○	○
Whian Whian Blackbutt									○	○	○
White Mahogany		○		○	○	○			○	○	○

Cypress Pine available in 62 x 20mm, 85 x 20mm, 98 x 20mm, 100 x 20mm, 108 x 20mm, 133 x 20mm

Please Note: Images are not always an accurate representation of the normal colour tones of a species. Please speak with your local Hurford's supplier for samples. If you do not know your closest Hurford's supplier or are unable to acquire your desired samples please email us at info@hurfordwholesale.com.au.

XL

PARQUETRY




BY HURFORD'S



A contemporary take on a historic style...

For a standout and visually appealing designed floor, Hurford's XL Parquetry will give your home or commercial space a unique feature with the charm of historic style.

Single blocks are manufactured so they can be installed into endless parquetry patterns, popular patterns suggested are Herringbone, Brick Pattern and Square on Square. A selection of Australian native species are available for you to choose.



XL Parquetry Specifications

Species: Blackbutt, Brush Box, Grey Ironbark, New England Blackbutt, Red Ironbark, Silvertop, Spotted Gum – NSW, Spotted Gum – QLD, Sydney Blue Gum, Thermally Enhanced Sydney Blue Gum, *Roasted Peat & Roasted Cayenne (Other species available on request)

Grade: Prestige

Profile: Secret Nail, Tongue & Groove, End Matched

Coating: Uncoated (Sand and coat once installed)

Size: 130mm x 14mm
*Roasted Peat & Roasted Cayenne 128 x 14mm (Different widths available on request)

Length: 650mm
*Roasted Peat & Roasted Cayenne 640mm (Different lengths available on request)

Coverage: 1.014M²/box
*Roasted Peat & Roasted Cayenne 0.983 M²/box

Packaging: 12 pieces per box – Left and Right Box

Install Over: Wood, particle board, plywood & plywood over concrete



American Oak

American Oak is a popular species for flooring due to its interesting and pronounced grain pattern. American Oak is also a species that takes stain extremely well, meaning that a multitude of colours can be achieved with little fuss. Hurford's import raw American Oak feed stock, and the timber is re-dried, treated, machined and graded.

American Oak is grown predominantly on the East Coast of the United States. All the White Oak raw material that Hurford's source is from reputable sawmills that practice sustainable forestry.

Species	American Oak
Grade	Prestige or Rustic
Profile	Top Nail, Tongue & Groove (End Matched)
Size	130x19mm, 155x19mm, 180x21mm, 205x21mm & 220x21mm
Lengths	600mm – 4500mm
Colours	Golden honey browns, some boards can have hints of soft pink tones.



Nothing quite captures the romance of a beautiful hardwood floor, like genuine French Oak.

From the base in Vermelles, France, our own staff source sawn French Oak boards from boutique French Sawmills, through a strict forestry scheme. The sawn French Oak boards are then dried to the rigorous Hurford's standard before the final production and quality assurance phase. Hurford's genuine French Oak Solid Hardwood Flooring is graded to capture all the character and charm of this extraordinary resource.

Species	French Oak
Grade	Provincial, Rustic
Profile	Top Nail Tongue & Groove (End Matched)
Size	83mm x 12mm, 130mm x 12mm, 180mm x 21mm, 195mm x 21mm, 205mm x 21mm,
Lengths	600mm – 2500mm







Solid Oak Block Parquetry Herringbone and Chevron

Parquetry is a unique floor system with its decorative patterns, adds quality and value to new and renovated spaces.

Species	European Oak
Grade	Prestige
Profile	Square Edge
Size	123mm x 18mm
Lengths	700mm
Coating	RAW (Sand and coat once installed)
Pieces Per Box	12 Pieces
Coverage Per Box	1.033m ²




Herringbone Pattern



Chevron Pattern

THE IMPORTANCE IN SELECTING THE RIGHT FINISH FOR YOUR FLOOR.

Choosing Hurford's high quality solid hardwood flooring is an important step to having a beautiful floor installed in your home, but choosing what finish is applied on top of it can make all the difference to the look and feel. Finish choices are developing at a rapid pace and products that give a more natural deep earthy tone are becoming popular.

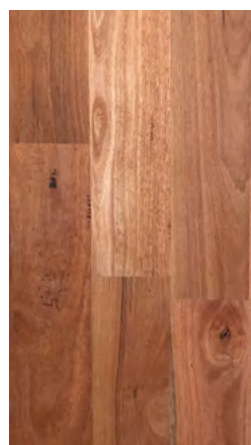


Blue Gum with
Water Based Finish



Blue Gum with
Oil Based Finish

The above example shows 2 panels of Sydney Blue Gum Flooring with alternate finishes applied. A water based finish gives a lighter appearance whereas an oiled finish brings out a darker tone. These examples are only indicative however they show that a deeper red colour can be achieved depending upon the finish that is applied.

It is recommended to test different finishes on offcut flooring pieces to finalise your finish choice.

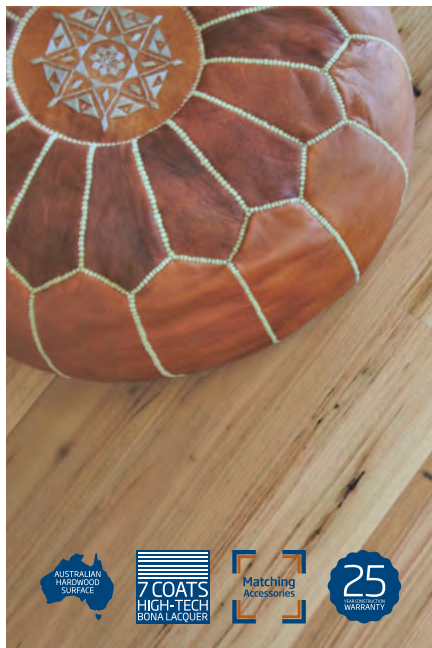



Emphasising Australia's much loved classic species, Blackbutt, Blue Gum, Brush Box, Silvertop Stringybark & Spotted Gum.

Species	Blackbutt, Rustic Blackbutt, Blue Gum, Brush Box, Silvertop, Spotted Gum & QLD Spotted Gum	Blackbutt, Rustic Blackbutt, Spotted Gum & QLD Spotted Gum
Surface	Australian Hardwood Smooth	Australian Hardwood Smooth
Locking System	Välinge 5G Glueless Joining System	Välinge 5G Glueless Joining System
Edge Profile	Micro Bevel (Sides and Ends)	Micro Bevel (Sides and Ends)
Coating	Bona UV Lacquer system, Matte 8-12%	Bona UV Lacquer system, Matte 8-12%
Size	132mm	180mm
Length	1,830mm & 2,190mm	1,830mm & 2,190mm
Thickness	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)
Packaging	8 rows per box, max 3 nested rows Rustic Blackbutt: 8 rows per box, max 4 nested rows	6 rows per box, max 3 nested rows Rustic Blackbutt: 6 rows per box, max 4 nested rows



Australian Native Herringbone provides that organic, natural, warm feeling, pre-finished in six iconic species.

Species	Blackbutt, Rustic Blackbutt, Blue Gum, Brush Box, Silvertop, Spotted Gum & QLD Spotted Gum
Core Material	Hevea
Locking System	Tongue & Groove (ends and sides)
End Profile	End Matched
Edge Profile	Micro Bevel
Size	120mm
Thickness	14mm (Lamella Nominal 4mm)
Length	600mm
Surface	Smooth
Coating	Bona UV Lacquer System, Matte 8-12%.
Coverage	0.576 m ² /box
Packaging	8 pieces per box – 4 Set A (left) & 4 Set B (right)
Install Suitability	Direct glued
Install Sub-Floor Heating	No
Install Over	Wood, concrete, plywood & plywood over concrete
Colour Match Accessories	Yes

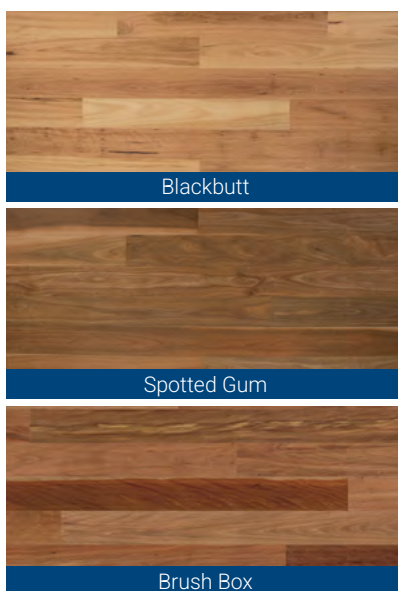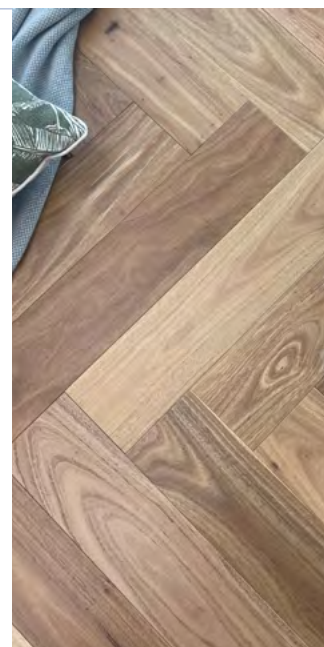

INTRODUCING Australian Native Optimise

...where sleek flooring meets uncompromising sustainability.

Species	Blackbutt, Blackbutt Rustic, Brush Box, Spotted Gum, QLD Spotted Gum & Blue Gum	Blackbutt & Spotted Gum
Coating/Finish	Bona UV Lacquer system	Bona UV Lacquer system
Length	1,830mm & 2,190mm	1,830mm & 2,190mm
Width	132mm	180mm
Thickness	13.5mm (Lamella Nominal 3mm)	13.5mm (Lamella Nominal 3mm)
Edge Profile	Micro Bevel (Sides and Ends)	Micro Bevel (Sides and Ends)
Coverage	1,830mm – 1.976m ² & 2,190mm – 2.365m ²	1,830mm – 1.976m ² & 2,190mm – 2.365m ²
Packaging	8 rows per box, maximum of 3 nested rows. Rustic Blackbutt: 8 rows per box, max 3 nested rows.	6 rows per box, maximum of 3 nested rows. Rustic Blackbutt: 6 rows per box, max 4 nested rows.



Specifications	260/20	240/15	190/15	190/14
Colour Stains	Snowfall", Hamptons, White Wash, Natural Clear, Western, Barrel, Slate Grey and RAW (Uncoated)	Whitehaven, Snowfall", Hamptons, White Wash, Natural Clear, Western, Distress", Smouldered", Caramel, Urban, Barrel, Vintage, Wheat, Slate Grey, Ash", Smokey", Chocolate", Tuxedo", Sterling", Nuage", Contrast" & RAW (Uncoated)	Whitehaven, Snowfall", Hamptons, White Wash, Natural Clear, Western, Distress", Smouldered", Caramel, Urban, Barrel, Vintage, Wheat, Slate Grey, Ash", Smokey", Chocolate", Tuxedo", Sterling", Nuage", Contrast" & RAW (Uncoated)	Whitehaven, Snowfall", Hamptons, White Wash, Natural Clear, Western, Distress", Smouldered", Caramel, Urban, Barrel, Vintage, Wheat, Ash", Sterling, Smokey", Nuage", Chocolate", Slate Grey, Contrast" & Tuxedo"
Surface	Subtle Brush Texture Oak - Character	Subtle Brush Texture Oak - Prime	Subtle Brush Texture Oak - Character	Subtle Brush Texture Oak - Character
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel
Coating	UV cured 5 coat Ciranova Lacquer system - Ultra Matte	UV cured 7 coat Treffert Lacquer system - Ultra Matte	UV cured 7 coat Treffert Lacquer system - Ultra Matte	UV cured 7 coat Treffert Lacquer system - Ultra Matte
Size	260mm	240mm	190mm	190mm
Length	2,200mm	2,200mm	1,900mm	1,900mm
Thickness	20mm (Lamella 6mm)	15mm (Lamella 4mm)	15mm (Lamella 4mm)	14mm (Lamella 3mm)
Packaging	4 rows per box, 1 nested row multiple boards up to 3, minimum 600mm	5 rows per box, 1 nested row multiple boards up to 3, minimum 600mm	6 rows per box, max of 2 nested rows	6 rows per box, max of 2 nested rows

*Longer lead times may apply for this colour.

Be exposed to Naked Oak.

Manufactured in a world class mill, Naked Oak is a masterful combination of Oak bonded to a strong plantation eucalypt plywood core. The engineered profile features kissed edges on all four borders, to create an overall dimensional look, and a traditional tongue and groove locking system for easy installation. Each lamella has been exclusively sorted and graded, with only the highest quality oak qualifying for production.

Naked Oak is finished using a wire brushing technique, removing the soft grain to create a surface with natural depth and texture. The uninterrupted topographic like grain of the Oak is accentuated with a Natural stain which simultaneously illuminates the distinct almond, blonde tones to the deep champagne hues of the heartwood.



Naked^{OAK}

Premium Oak Engineered Flooring


BY HURFORD'S

Naked Oak Specifications	NATURAL	RAW
Surface	Light Brushed Texture - Oak Prime	Smooth Lightly Sanded - Oak Prime
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel (Sides and Ends)	Fine Sand, Square Edge
Coating	UV Lacquer Matte	RAW (Uncoated)
Size	190mm	190mm
Length	1,830mm & 2,190mm	1,830mm & 2,190mm
Thickness	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)
Packaging	6 rows per box, max of 2 nested rows	6 rows per box, max of 2 nested rows

HM WALK

HARDWOOD ENGINEERED FLOORING


BY HURFORD'S



AMERICAN
WHITE OAK




BLACKBUTT




SILVERTOP




TALLOWWOOD



SPOTTED GUM




BRUSH BOX



IRONBARK



SYDNEY
BLUE GUM




JARRAH



BRUSH BOX
- MATTE



SYDNEY BLUE GUM
- MATTE

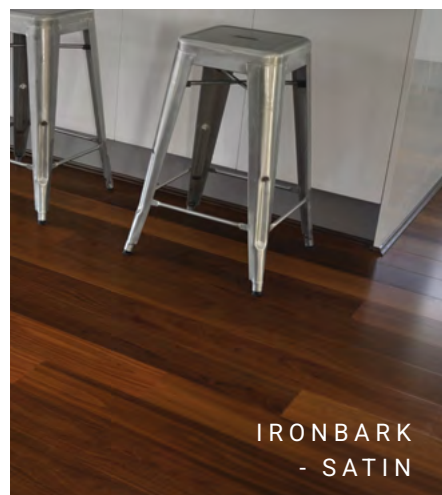

IRONBARK
- SATIN

HM Walk Specifications	SATIN	MATTE	OAK
Species	Blackbutt, Brush Box, Ironbark, Jarrah*, Spotted Gum & Sydney Blue Gum	Blackbutt, Brush Box, Ironbark, Silvertop, Spotted Gum, Sydney Blue Gum & Tallowwood	American White Oak
Surface	Australian Hardwood Smooth	Australian Hardwood Smooth	Australian Hardwood Smooth
Locking System	Välinge 2G Glueless Joining System	Välinge 5G Glueless Joining System	Välinge 2G Glueless Joining System
Edge Profile	Micro Bevel (Side and Ends)	Micro Bevel (Side and Ends)	Micro Bevel (Side and Ends)
Coating	13 coat system incorporating Aluminium Oxide - Satin Finish	13 coat system incorporating Aluminium Oxide - Matte Finish	13 coat system incorporating Aluminium Oxide - Matte Finish
Size	136mm & 186mm	136mm	186mm
Length	1,830mm	1,830mm	1,830mm
Thickness	13.5mm (0.6mm Veneer)	12.5mm (0.6mm Veneer)	13.5mm (0.6mm Veneer)
Packaging	6 rows per carton, up to 2 nested rows	6 rows per carton, up to 2 nested rows	6 rows per carton, up to 2 nested rows

*Jarrah only available in 136mm board width.

ROASTED PEAT - BONA UV CRAFT OIL



BLACKBUTT - BONA UV CRAFT OIL

SPOTTED GUM - BONA UV CRAFT OIL

LUXURY IN ANY SPACE BRINGS THE FEELING OF STYLE AND SOPHISTICATION, AND STARTS FROM THE FLOOR UP.

Burleigh Floors Specifications

Species	Blackbutt	Spotted Gum	Blackbutt, Spotted Gum	Roasted Peat
Coating	Invisible UV Lacquer	UV Lacquer	UV Craft Oil	UV Craft Oil
Edge Profile	Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel
Surface	Light Brushed	Light Brushed	Light Brushed	Smooth
Finish	Matte	Matte	Matte	Matte
Locking System	Tongue & Groove (Side & Ends)	Tongue & Groove (Side & Ends)	Tongue & Groove (Side & Ends)	Tongue & Groove (Side & Ends)
Size	135mm	135mm	135mm & 180mm	180mm
Thickness	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)	14mm (Lamella Nominal 4mm)
Core	Havea	Havea	Havea	Havea
Length	1,830mm & 2,190mm	1,830mm & 2,190mm	1,830mm & 2,190mm	1,830mm & 2,190mm
Packaging	135mm: 8 rows per box, max of 3 nested rows	135mm: 8 rows per box, max of 3 nested rows	135mm: 8 rows per box, max of 3 nested rows 180mm: 6 rows per box, max of 2 nested rows	180mm: 6 rows per box, maximum of 2 nested rows
Coverage	135mm: 1,830mm - 1.976m ² 2,190mm - 2.365m ²	135mm: 1,830mm - 1.976m ² 2,190mm - 2.365m ²	135mm: 1,830mm - 1.976m ² 2,190mm - 2.365m ² 180mm: 1,830mm - 1.976m ² 2,190mm - 2.365m ²	180mm: 1,830mm - 1.976m ² 2,190mm - 2.365m ²
Installation	Glue Down, Floated	Glue Down, Floated	Glue Down, Floated	Glue Down, Floated

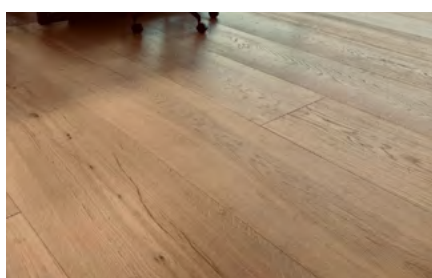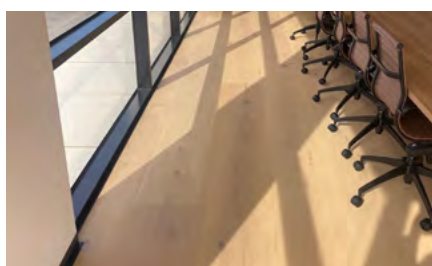

Burleigh Floors 400mm Wide Oak Specifications

NATURAL (Pre-finished Stain)

Species	European Oak
Coating	Invisible UV Lacquer
Width	400mm
Thickness	20mm (Lamella Nominal 5mm)
Length	2,800mm & 5,000mm
Construction	Multi Ply – Eucalyptus Substrate and Birch Back Layer
Locking System	Tongue & Groove, End Matched, Micro-Bevel Edge
Surface	Lightly Brushed
Install Suitability	Glue Down
Coverage	2,800mm - 2.24m ² & 5,000mm - 4.0m ²
Packaging	2 rows per box, some boxes contain nested rows. No less than 1,000mm for the nested length



CREATE A STRIKING CUSTOM SHOWPIECE FROM THE FLOOR UP USING HURFORD HERRINGBONE ENGINEERED PARQUET FLOORING.


Specifications

Surface	Smooth Lightly Sanded - Oak Prime
Locking System	Tongue & Groove (Sides & Ends)
Edge Profile	Square Edge, Side & Ends
Coating	RAW (Uncoated)
Size	120mm
Length	600mm
Thickness	14mm (Lamella Nominal 3mm)
Packaging	24 pieces per box




Hurford's Parquetry Specifications

	PRE-FINISH COLOUR	RAW
Colours	Natural Clear, Western, Blonde, Mink & Hazel	RAW (Uncoated)
Pattern	Chevron or Herringbone	Chevron or Herringbone
Surface	Light Brushed Texture - Oak Character	Smooth Lightly Sanded - Oak Character
Locking System	Tongue & Groove (Sides and Ends)	Tongue & Groove (Sides and Ends)
Edge Profile	Micro Bevel (Sides and Ends)	Fine Sand, Square Edge (Side and Ends)
Coating	UV cured 6 coat Klumpp system - Ultra Matte	RAW (Uncoated)
Size	150mm	150mm
Length	750mm	750mm
Thickness	14mm (Lamella Nominal 3mm)	14mm (Lamella Nominal 3mm)
Packaging	20 pieces per box	20 pieces per box



Herringbone Pattern



Chevron Pattern



HERITAGE
LUXURY VINYL PLANK
BY HURFORD'S

Specifications

Colours	Caramel, Coastal Blackbutt, Hamptons, Huonville Tasmanian Oak, Mink, Natural Clear, Roasted Spotted Gum, NSW Spotted Gum, Western & Wheat
Thickness	4.5mm (0.5 Wear Layer)
Length	1,524mm
Width	228mm
Packaging	7pcs – 2.44m ² /box
Slip Rating	P3



Durable



Low maintenance



100% recyclable



Non slip back



Quiet underfoot




Water resistant



Pet friendly



Ultra realistic timber designs

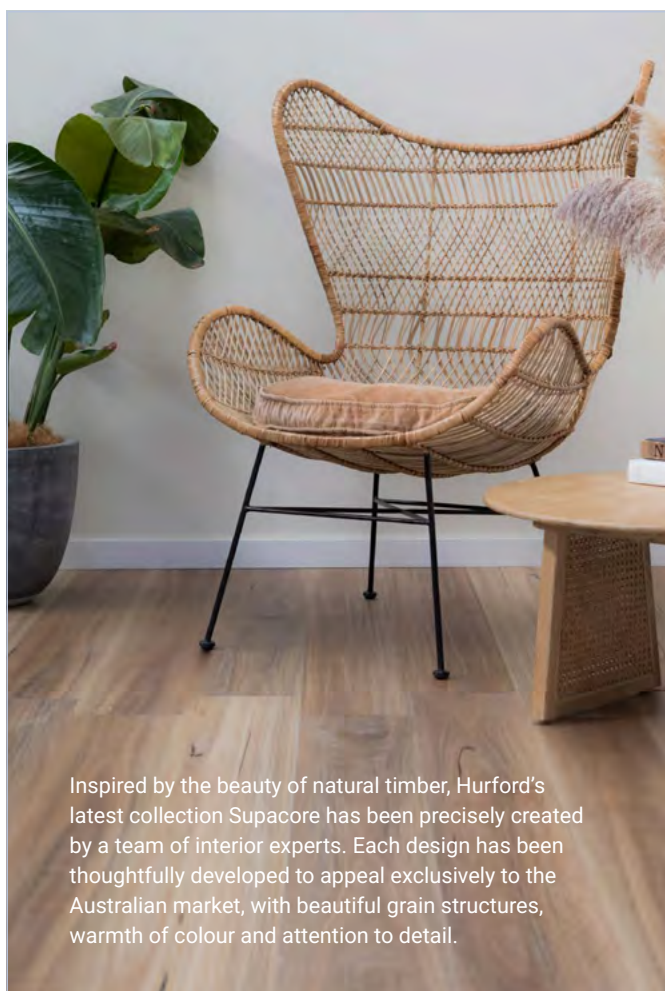

SUPACORE
WATERPROOF HYBRID FLOORING
BY HURFORD'S

Specifications

Colours	Blackbutt, Spotted Gum, Carbon, Chestnut, French Grey, Harbor Grey, Khaki, Sandstone
Thickness	5mm + backing (6.5mm overall)
Wear Layer	0.55mm
Dimensions	1500 (L) x 180mm (W)
Planks per box	6
M ² per box	1.62m ²
M ² per pallet	89.10m ²
Install Method	Drop Lock
Finish	Matte
Surface	Aus = embossed, oaks = EIR
Top layer	Decorative film & Wear layer
Substrate Layer	Limestone Composite
Backing Layer	1.5mm IXPE
Profile	Micro Bevel
Protective Coating	UV Coating

Shou Sugi Ban

REFINED ARCHITECTURAL CLADDING

焼杉板

BY HURFORD'S

A complete system.

Hurford's Shou Sugi Ban Refined Architectural Cladding combines the ancient Japanese craft of fire treatment with a precision milled, architectonic cladding profile. It is a complete solution for any exterior wall, offering not just the cladding but a selection of customised trims to ensure a streamline execution and watertight result.

The timber species selected to manufacture Hurford's Shou Sugi Ban is ethically sourced and processed by Hurford's locally owned and operated facility in Queensland, Australia. Favourably sort after for its natural qualities and unique appearance, Cypress is highly durable and a naturally termite resistant species. Applying the fire treatment forces an additional barrier of protection against insect attack and decay, furthermore increasing the species overall durability.

Periodic maintenance, including reapplying a fresh coat of Intergrain Industrial Solid Timber Stain, Charred Black is required to maintain the dark burnt texture of the product. Leaving the product unmaintained or uncoated will lead to the dark Shou Sugi Ban to naturally patina and age, changing its appearance. This change in appearance will not affect the performance of the product.

Specifications

CLADDING

Profile: Coulee

Cover Size: 68mm & 118mm

Thickness: 21mm

Length: Random

Moisture Content: AS1080.1

Fixing: Concealed fixing

Species: Cypress, Durable Australian Hardwoods

Joining: End-matched, micro bevel



Finish: Intergrain Industrial Solid Timber Stain, Charred Black

TRIMS


External Corner: Powdercoated Aluminium

Internal Corner: Powdercoated Aluminium


End Stop: Powdercoated Aluminium

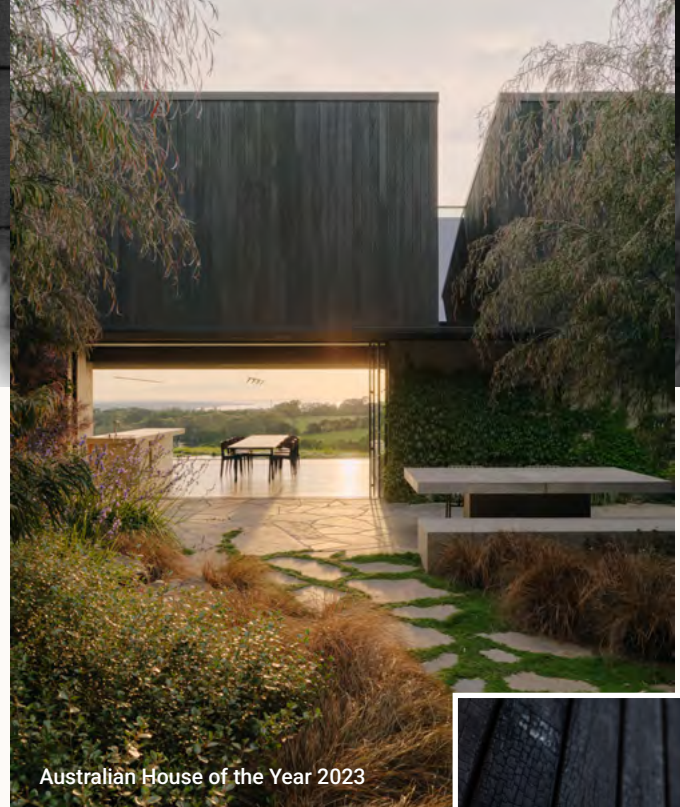

Profile Design Coulee

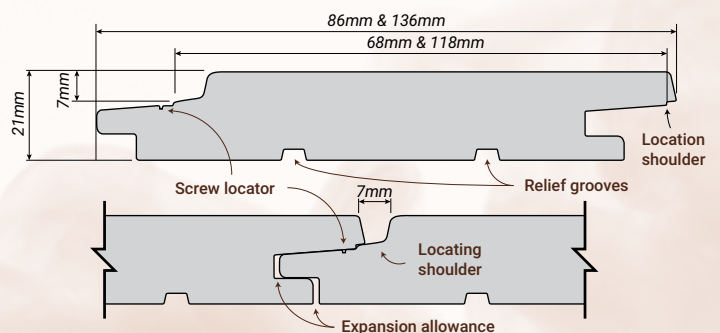

Trim designs external corner, internal corner, end stop

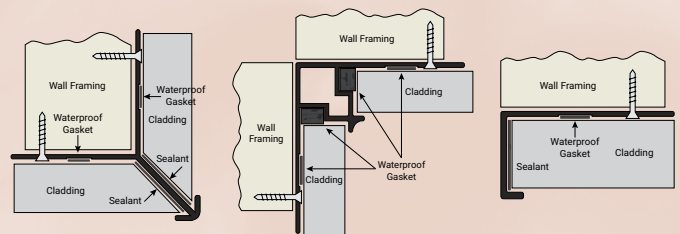



**WOOD
ELEMENTS**
REFINED ARCHITECTURAL HARDWOOD CLADDING

BY HURFORD'S



**WOOD
ELEMENTS**
REFINED ARCHITECTURAL HARDWOOD CLADDING


BY HURFORD'S

WOOD ELEMENTS brings natural style to any exterior surface, whether as an individual feature or an entire façade.




Architectural Specification

PRODUCT NAME	WOOD ELEMENTS CLADDING
Profile Name:	Coulee & Flume
Species:	Blackbutt, Cypress, Ironbark, New England Blackbutt, Spotted Gum, Tallowwood & Turpentine
Appearance:	Dressed Face or Sawn Brushed Face
Cover Size:	50mm, 68mm or 118mm
Thickness:	21mm
Length:	Random
Grade:	Standard & Better
Moisture Content:	Per AS2796.1
Fixing:	WURTH ASSY@plus 4 A2 SRCS Terrace Construction Screw A2 Stainless Steel Plain Partial Thread Raised Countersunk Head 0166815550 Available to purchase from Hurford's
Joining:	End Matched, Micro Bevel
Trim - External Corner:	1. Aluminium with fitted moisture proof gasket 2. Wood with moisture proof gasket
Trim - Internal Corner:	1. Aluminium with fitted moisture proof gasket 2. Wood with moisture proof gasket
Trim - End Stop:	1. Aluminium with fitted moisture proof gasket 2. Wood with moisture proof gasket
Pre-Oil Option:	Intergrain® Industrial Universal Timber Oil

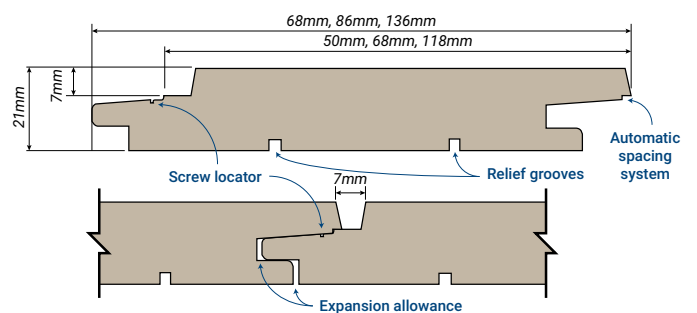

Coulee

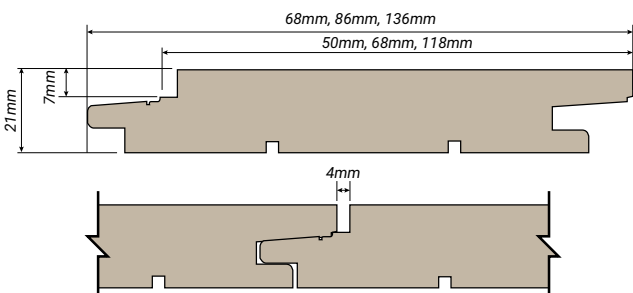

Flume

Introducing Boss Board

an architectural embossed cladding

Using advanced technology, it offers a choice of three refined embossing patterns. Supplied primed, it enables homeowners and designers to select their preferred colour and finish for a truly tailored outcome.

Crafted from H3-treated Radiata Pine or Australian Hardwood, this range has been designed with long-term durability front of mind.

Combining creative flexibility with enduring performance, Boss Board is crafted to elevate any project.

Pattern:	Charred, Cross Cut, Wood Grain
Species:	Radiata Pine OR Australian Hardwoods
Profile:	Coulee (End Matched)
Lengths:	Random Length
Cover Width:	118mm
Thickness:	19mm or 21mm
Finish:	Primed OR Raw
Treatment:	H3 Radiata Pine OR Australian Hardwoods



3 Refined Embossing Patterns

Pictured with an inspired finish, this cladding is supplied primed. The painted surfaces are shown for inspiration and guidance only.

CHARRED



CROSS CUT



WOOD GRAIN





barnWALL is a natural timber wall lining that has been repurposed from ageing, disused hardwood, that was once destined to be forgotten.




hardWALL is a natural timber wall lining that offers a very unique industrial look that will transform the identity of a space, creating a raw modern atmosphere.




woodLINE can be installed as a undercover lining, internal feature wall and ceiling lining. Brings a sense of warmth and elegance to an interior or patio area.

PROFILE OPTIONS


Two Strip

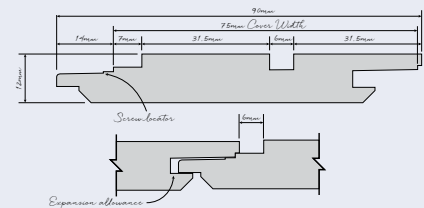

Shadow Line

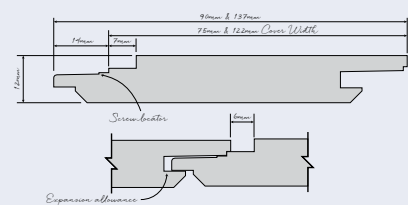

Open VJ

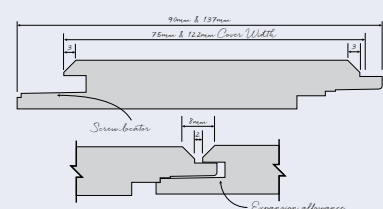



Decking

Decking is a great feature to add to your home. With this valuable addition, your living and entertaining space is extended for you to enjoy outdoor living for years ahead. Hurford's have kiln dried decking timber available in both Australian and Imported hardwoods in a wide range of species, and grades. Hurford's decking sizes include: 64 x 19mm, 84 x 19mm, 135 x 19mm, 136 x 22mm, 140 x 22mm, 140 x 25mm & 135 x 32mm.

Screening

Timber screening is a cost effective, durable and decorative way to provide more privacy, hide areas from view, protect from the elements or provide security. Hurford's have kiln dried screening timber available in both Australian and Imported hardwoods in a wide range of species and grades. Hurford's screening sizes include: 40 x 19mm, 40 x 30mm & 40 x 40mm




Shiplap

Hurford's Shiplap Cladding provides a modern, fresh, stunning clean and straight-line option to finish off the exterior of a residential or commercial building. Available in Australian species Cypress, Blackbutt, Spotted Gum, Tallowwood, Turpentine & Ironbark. Available in three cover sizes 50mm, 72mm and 122mm x 19mm thick.



Trex®

The World's #1 Decking Brand

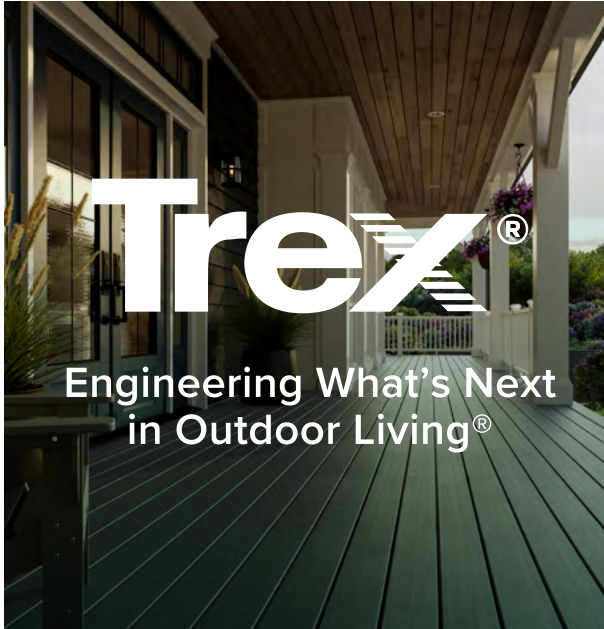

Engineering What's Next
in Outdoor Living®

TREX COMPOSITE DECKING

Trex® high-performance composite deck boards resist fading, scratches, and stains, eliminating the need for maintenance. They won't rot, warp, peel, or be devoured by termites. Our 50-year warranties provide confidence for decades. Sustainably made in the USA from 95% recycled plastic film and reclaimed sawdust.


SCAN THE QR CODE
TO GET YOUR **FREE**
TREX SAMPLES!



Trex Transcend® Lineage™ Composite Decking

The award-winning next generation of design and performance, featuring SunComfortable™ technology for our coolest decking yet.


Board Size	140mm x 25mm x 5.48m	Slip Rating	P5
------------	----------------------	-------------	----

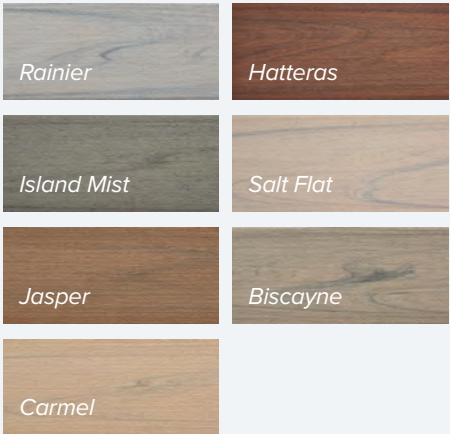

Trex Transcend® Composite Decking

Elevated aesthetics paired with the highest level of performance.


Board Size	140mm x 25mm x 5.48m	Slip Rating	P2
------------	----------------------	-------------	----

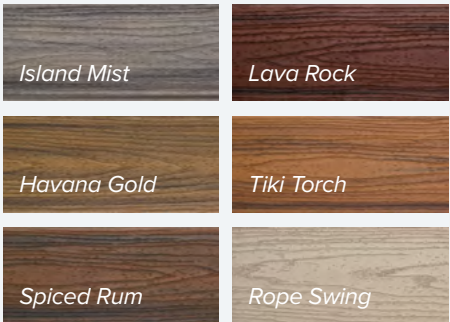

Trex Select® Composite Decking

Select decking is the perfect pairing of price and minimal maintenance and features SunComfortable™ technology for our coolest decking yet.*

Board Size	140mm x 22mm x 5.48m	Slip Rating	P4
------------	----------------------	-------------	----

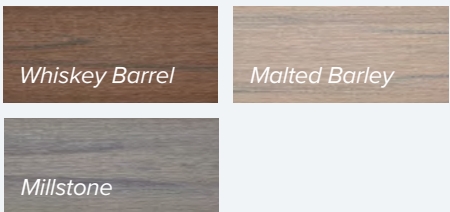

Joinery Timber

Wood is an attractive construction material from stunning furniture pieces through to spectacular staircases and door joinery as well a striking feature structures. It offers a superior performance with design options only limited to your imagination.


Hurford's specialise in producing and supplying an extensive range of joinery timbers to the requirements of timber merchants, joiners and manufactures all over Australia.

Our diverse range of Australian and Imported species enhance the appearance selection for colour tones and grains for all design opportunity.

By having quality control over processes, we make certain the timber supplied at the beginning is to a high standard to reflect through to the end internal or external application.

Australian and Imported Joinery Timber Species are available in an array of grades, sizes and random length packs.

- | | | |
|---------------|--------------|-----------------|
| · Blackbutt | · Kwila | · American Oak |
| · Blue Gum | · Surian | · French Oak |
| · Brush Box | · Walnut | · American Ash |
| · Spotted Gum | · NZ Pine | · Tallowood |
| · Durian | · Amoor | · Victorian Ash |
| · Melunak | · Cherry | · Jarrah |
| · Rosewood | · Meranti | · Ironbark |
| · Jelutong | · Euro Beech | · Turpentine |

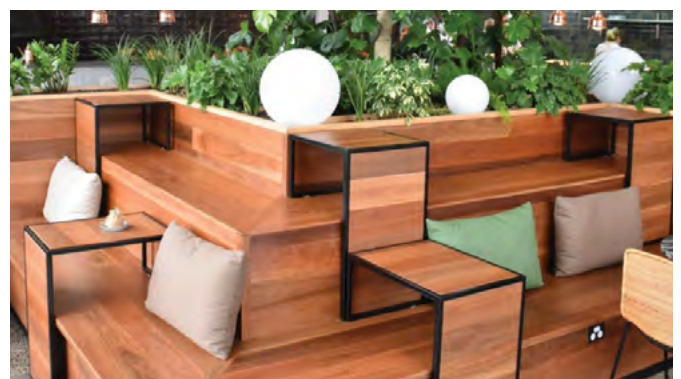

Landscaping & Structural Timber

Hurford's stock consists of quality fencing and landscaping timbers and a range of structural F graded timbers ideal for high strength applications. We have treated stock available for above and in ground protection against fungal decay, borers and termites.


Landscaping products:

- Hardwood Palings Tan E H3
- Hardwood Rails Tan E H3
- Hardwood Posts Tan E H4
- Hardwood Sleepers Tan E H4

Palings, rails and posts also available in treated pine.

Structural products:

- Green Hardwood F14 Untreated
- Green Hardwood F17 Untreated
- Green Hardwood F22 Untreated
- Green Hardwood F14 Treated
- Green Hardwood F17 Treated
- Green Hardwood F22 Treated
- Cypress Sawn Unseasoned F7
- KD Hardwood F27 Non Durable (interior only)
- KD Hardwood F27 Dura 1 (exterior use)

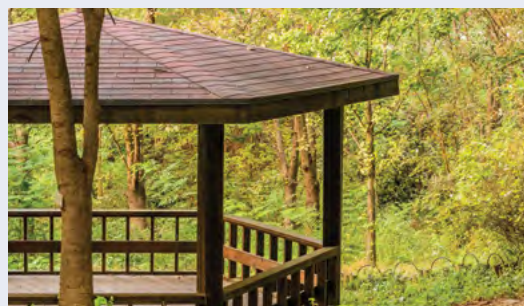

Cypress Products

Cypress is an economical and sustainable softwood timber, plentiful in NSW and QLD. The highly durable species is naturally termite resistant making it ideal for building and construction applications such as cladding, fencing and landscaping, while the features of Cypress timber creates an appealing and unmistakable flooring product.

Hurford's extensive range of Cypress products include:

- Screening & Decking
- Solid select grade flooring
- Pre-finished solid flooring
- Solid flooring with reverse VJ profile
- Chamfer & Shiplap
- Sawn Unseasoned F7
- Sawn Unseasoned Posts

Our Cypress harvested from the Barakula State Forest in Western Queensland is otherwise known as "Barakula Gold", due to the superior quality of the raw material. Hurford's Cypress Mill in Chinchilla is the only licensee in the Barakula State Forest, and as such Hurford's is the sole supplier of the Barakula Gold range of Cypress.



Panel & Plywood



Structural Plywood (CD)

Structural plywood is an engineered wood panel designed to be a high-strength sheet for use in general structural building and construction, subject to an application's load bearing requirements.



Feature Ply (AC, BB, BC)

Commonly finished in a clear to highlight the face, Feature Ply is ideal for use in broad range of structural and non-structural applications including decorative ceiling and wall linings, whether left solid, slotted or perforated with small holes.



Marine Ply

Manufactured using high quality plantation hoop pine veneers and a type A Phenolic bond, hoop pine plywood is well suited to marine applications based on its density, bending strength, impact resistance and surface finishing characteristics.



Hardform Formply

Durable and reusable, Hardform is made from cross-banded veneers and high quality phenolic surfaces to provides users with the convenience of both bi-directional strength (F14 or F17) and dimensional stability.

Other Panel and Plywood products we can supply:

- Structural Plywood (CD)
- Non-Structural Plywood (CD)
- Bracing Plywood
- Feature Plywood (AC, BB, BC)
- Bendy Ply
- Lauan Ply
- BB/CC Plywood
- Marine Ply (BS1088)
- Marine Ply (AS/NZS 2272-2006)
- T & G Hardwood Flooring Ply
- T & G Softwood Flooring Ply
- Hardform Formply
- Particleboard Raw
- White Melamine Particleboard
- Particleboard Flooring



EchoPanel® is the original decorative interior panelling solution, with acoustic qualities and eco-innovation at its core.

EchoPanel® reduces and controls reverberated noise in shared environments, making it ideal for use in a variety of commercial interior spaces including workplace, education and hospitality environments. It is a streamlined product with a fabric-like finish, designed with dematerialisation in mind. Once it's been installed, there is no need to upholster, paint or protect it. Pioneering the war against single-use plastic, EchoPanels® production uses post-consumer recycled PET bottles to create a superior upcycled product with a vast array of interior applications.

View Hurford's website for more colours and patterns.

SPECIFICATIONS

PRODUCT	ECHOPANEL® 7mm	ECHOPANEL® 12mm	ECHOPANEL® 24mm
ORIGIN	Made In Australia	Made In Australia	Made In Australia
COMPOSITION	100% PET (60% Recycled)	100% PET (60% Recycled)	100% PET (60% Recycled)
WEIGHT	1400g/m ² (+/- 10%)	2400g/m ² (+/- 10%)	3000g/m ² (+/- 10%)
THICKNESS	7mm (+/- 7%)	12mm (+/- 7%)	24mm (+/- 7%)
PANEL DIMENSIONS	2800mm (+/-10mm) x 1200mm (+/-5mm)	2800mm (+/-10mm) x 1200mm (+/-5mm)	2400mm (+/-5mm) x 1820mm (+/-10mm)



OneTrim is a collection of radiata pine, white pre-primed, kiln dried, finger jointed mouldings. We offer an extensive selection from contemporary to traditional profiles that add distinctive features, dimension, texture and architectural interests to your home, retail or commercial interior.

OneTrim mouldings are manufactured from sustainable plantation grown Radiata Pine. A timber species that is lightweight yet strong and durable, making OneTrim very easy to work with. Any natural knotty character or imperfections are removed and then a finger jointed process is implemented. OneTrim mouldings are given a surface sand to smooth out finger jointed joins or raised gains, then two coats of white primer is applied producing a quality finish.

Fixing Installation Guide

Storage	Prior to installation, store OneTrim mouldings inside the room you intend to install, so they can acclimatise to the environment. Keep DRY and off the ground as mouldings may take in moisture over time. Keep mouldings stacked flat to avoid bending.
Health & Safety	When handling moulding make sure, you wear the appropriate personal protective equipment (PPE); gloves, safety glasses, respiratory protection equipment and your workspace is well ventilated. For more in depth information please view OneTrims Material Safety Data Sheet (MSDS) on our website.
Cutting & Chiselling	When cutting mouldings to length with a power or hand held saw, use sharp saw blades to prevent jagged edges. If required to use a chisel ensure that the tool is sharp and well maintained. Recommend you prime and seal saw cuts to stop moisture intake.
Nailing	To make certain that the installation of mouldings is secure, it is strongly recommended you nail and use construction adhesive glue. If using a nail gun you want the nail to be slightly below the moulding surface. To avoid the nail shooting too deep, you will need to make adjustments to suit moulding thickness. Fill nail holes with a quality wood filler.
Sanding & Painting	To prep mouldings before painting, give them a slight sand for an even coat and wipe over to remove any dust or residue. Then you are ready to paint on your top coat, one or two coats may be required.
Disposal	Dispose of OneTrim mouldings, at a permitted landfill facility in accordance with local, state and federal regulations. It is a good idea to keep some unused offcuts for any unforeseen repairs.



**Primed & Ready for
your choice of Topcoat**



**Internal
Installation Only**



**Time Saving on
Preparation Time**



**Strong
& Durable**



**Warranty on
Structural Integrity**

About Hurford's



An Australian Business.

Founded in 1932 Hurford's is an Australian third generation family business, strongly dedicated to the native hardwood timber industry, celebrating over 90 years of trade.



50 + Timber Species.

Strong relationships forged over the decades with producers both domestically and internationally allow Hurford's to source an impressive variety of native and exotic specialty timbers.



Nationwide Distribution.

With distribution warehouses located in Queensland, New South Wales, Victoria, South Australia and Western Australia Hurford's are able to efficiently service the Australian market.



International Export.

We offer local Hardwoods, Cypress and Hurford Flooring lines for shipping to all major international markets. Hurford's international based branches: New Zealand, North America and France.



Queensland

400 Stapylton-Jacobs Well Road,
Stapylton QLD 4207
(07) 3442 6300
salesqld@hurfords.com.au

New South Wales & Australian Capital Territory

Unit 1/1 Orielson Road,
Smeaton Grange NSW 2567
(02) 4646 1406
salesnsw@hurfords.com.au

Victoria & Tasmania

51 Commercial Drive,
Pakenham VIC 3810
(03) 8794 3300
salesvic@hurfords.com.au

South Australia & Northern Territory

7-9 Acorn Road,
Camden Park SA 5038
(08) 8376 6694
salessa@hurfords.com.au

Western Australia

7 Carbonate Road,
Wangara WA 6065
0448 132 955
saleswa@hurfords.com.au

Proud Platinum Member &
Accredited Manufacturer of



Australasian
Timber Flooring
Association®

